

10SMBJ Series

ROHS

5.0 To 200V 1000W

Surface Mount Transient Voltage Suppressors

Description

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

Working Voltage: 5.0 to 200V

Peak Pulse Power: 1000W

Features


- ◆ Glass passivated chip
- ◆ 1000W peak pulse power capability with a 10/1000 μ s waveform
- ◆ Repetitive rate (duty cycle) : 0.01%
- ◆ Typical IR less than 1 μ A above 10V
- ◆ Excellent clamping capability
- ◆ Very fast response time
- ◆ High temperature soldering: 260 $^{\circ}$ C/10s at terminals.
- ◆ RoHS compliant

Applications

TVS devices are ideal for the protection of I/O interfaces, V_{cc} bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.



www.unsemi.com.tw

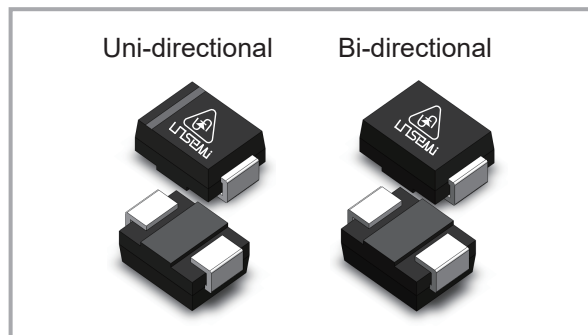

Mechanical Data

- ◆ Case: Molded plastic
- ◆ Epoxy: UL 94V-0 rate flame retardant
- ◆ Lead: Solderable per MIL-STD-750, method 2026 guaranteed
- ◆ Polarity: Color band denotes TVS cathode en
- ◆ Mounting position: Any


Maximum Ratings and Thermal Characteristics (T_A =25 $^{\circ}$ C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak power dissipation with a 10/1000 μ s waveform	PPPM	1000	W
Power Dissipation on Infinite Heat Sink at T _L =75 $^{\circ}$ C	PD	5.0	W
Peak pulse current with a 10/1000 μ s waveform	I _{PP}	See Next Table	A
Junction and storage temperature range	T _J , T _{STG}	-55 to +150	$^{\circ}$ C
Operating temperature range	T _{OP}	-40 to +125	$^{\circ}$ C
Maximum Instantaneous Forward Voltage at 50A for Unidirectional	V _F	5.0	V

Electrical Characteristics (@=25°C unless otherwise Specified)


Part Number		Marking		Reverse Stand-Off Voltage VRWM (V)	Breakdown Voltage VBR (V) @IT		Test Current IT (mA)	Maximum Clamping Voltage Vc @IPP (V)	Maximum Peak Pulse Current IPP (A)	Maximum Reverse Leakage IR @VRWM (µA)
Uni	Bi	Uni	Bi		MIN	MAX				
10SMBJ5.0A	10SMBJ5.0CA	A5	C5	5.0	6.40	7.00	10	9.2	108.7	200
10SMBJ6.0A	10SMBJ6.0CA	A6	C6	6.0	6.67	7.37	10	10.3	97.1	200
10SMBJ6.5A	10SMBJ6.5CA	A6V	C6V	6.5	7.22	7.98	10	11.2	89.3	100
10SMBJ7.0A	10SMBJ7.0CA	A7	C7	7.0	7.78	8.60	10	12.0	83.4	80
10SMBJ7.5A	10SMBJ7.5CA	A7V	C7V	7.5	8.33	9.21	1	12.9	77.6	50
10SMBJ8.0A	10SMBJ8.0CA	A8	C8	8.0	8.89	9.83	1	13.6	73.6	20
10SMBJ8.5A	10SMBJ8.5CA	AV8	CV8	8.5	9.44	10.40	1	14.4	69.5	10
10SMBJ9.0A	10SMBJ9.0CA	A9	C9	9.0	10.00	11.10	1	15.4	65.0	5
10SMBJ10A	10SMBJ10CA	A10	C10	10.0	11.10	12.30	1	17.0	58.9	2
10SMBJ11A	10SMBJ11CA	A11	C11	11.0	12.20	13.50	1	18.2	55.0	1
10SMBJ12A	10SMBJ12CA	A12	C12	12.0	13.30	14.70	1	19.9	50.3	1
10SMBJ13A	10SMBJ13CA	A13	C13	13.0	14.40	15.90	1	21.5	46.6	1
10SMBJ14A	10SMBJ14CA	A14	C14	14.0	15.60	17.20	1	23.2	43.1	1
10SMBJ15A	10SMBJ15CA	A15	C15	15.0	16.70	18.50	1	24.4	41.0	1
10SMBJ16A	10SMBJ16CA	A16	C16	16.0	17.80	19.70	1	26.0	38.5	1
10SMBJ17A	10SMBJ17CA	A17	C17	17.0	18.90	20.90	1	27.6	36.3	1
10SMBJ18A	10SMBJ18CA	A18	C18	18.0	20.00	22.10	1	29.2	34.3	1
10SMBJ20A	10SMBJ20CA	A20	C20	20.0	22.20	24.50	1	32.4	30.9	1
10SMBJ22A	10SMBJ22CA	A22	C22	22.0	24.40	26.90	1	35.5	28.2	1
10SMBJ24A	10SMBJ24CA	A24	C24	24.0	26.70	29.50	1	38.9	25.7	1
10SMBJ26A	10SMBJ26CA	A26	C26	26.0	28.90	31.90	1	42.1	23.8	1
10SMBJ28A	10SMBJ28CA	A28	C28	28.0	31.10	34.40	1	45.4	22.1	1
10SMBJ30A	10SMBJ30CA	A30	C30	30.0	33.30	36.80	1	48.4	20.7	1
10SMBJ33A	10SMBJ33CA	A33	C33	33.0	36.70	40.60	1	53.3	18.8	1
10SMBJ36A	10SMBJ36CA	A36	C36	36.0	40.00	44.20	1	58.1	17.3	1
10SMBJ40A	10SMBJ40CA	A40	C40	40.0	44.40	49.10	1	64.5	15.5	1
10SMBJ43A	10SMBJ43CA	A43	C43	43.0	47.80	52.80	1	69.4	14.4	1
10SMBJ45A	10SMBJ45CA	A45	C45	45.0	50.00	55.30	1	72.7	13.8	1
10SMBJ48A	10SMBJ48CA	A48	C48	48.0	53.30	58.90	1	77.4	13.0	1
10SMBJ51A	10SMBJ51CA	A51	C51	51.0	56.70	62.70	1	82.4	12.2	1
10SMBJ54A	10SMBJ54CA	A54	C54	54.0	60.00	66.30	1	87.1	11.5	1
10SMBJ58A	10SMBJ58CA	A58	C58	58.0	64.40	71.20	1	93.6	10.7	1
10SMBJ60A	10SMBJ60CA	A60	C60	60.0	66.70	73.70	1	96.8	10.4	1
10SMBJ64A	10SMBJ64CA	A64	C64	64.0	71.10	78.60	1	103.0	9.7	1
10SMBJ70A	10SMBJ70CA	A70	C70	70.0	77.80	86.00	1	113.0	8.9	1
10SMBJ75A	10SMBJ75CA	A75	C75	75.0	83.30	92.10	1	121.0	8.3	1
10SMBJ78A	10SMBJ78CA	A78	C78	78.0	86.70	95.80	1	126.0	8.0	1
10SMBJ85A	10SMBJ85CA	A85	C85	85.0	94.40	104.00	1	137.0	7.3	1
10SMBJ90A	10SMBJ90CA	A90	C90	90.0	100.00	111.00	1	146.0	6.9	1
10SMBJ100A	10SMBJ100CA	A100	C100	100.0	111.00	123.00	1	162.0	6.2	1
10SMBJ110A	10SMBJ110CA	A110	C110	110.0	122.00	135.00	1	177.0	5.7	1
10SMBJ120A	10SMBJ120CA	A120	C120	120.0	133.00	147.00	1	193.0	5.2	1
10SMBJ130A	10SMBJ130CA	A130	C130	130.0	144.00	159.00	1	209.0	4.8	1
10SMBJ150A	10SMBJ150CA	A150	C150	150.0	167.00	185.00	1	243.0	4.2	1
10SMBJ160A	10SMBJ160CA	A160	C160	160.0	178.00	197.00	1	259.0	3.9	1
10SMBJ170A	10SMBJ170CA	A170	C170	170.0	189.00	209.00	1	275.0	3.7	1
10SMBJ180A	10SMBJ180CA	A180	C180	180.0	201.00	220.00	1	292.0	3.5	1
10SMBJ190A	10SMBJ190CA	A190	C190	190.0	211.00	234.00	1	307.0	3.3	1
10SMBJ200A	10SMBJ200CA	A200	C200	200.0	224.00	247.00	1	324.0	3.1	1

Soldering Parameters

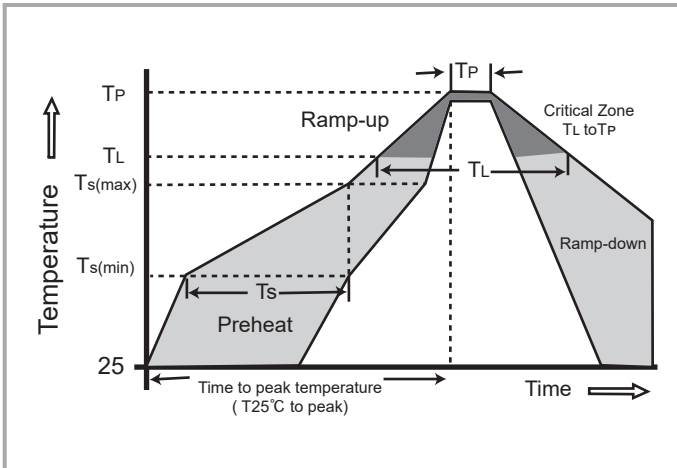

Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min (Ts(min))	150°C
	-Temperature Max (Ts(max))	200°C
	- Time (min to max) (Ts)	60 -180 Seconds
Average ramp up rate (Liquidus Temp TL) to peak		3°C/Second max
Ts(max) to TL - Ramp-up Rate		3°C/Second max
Reflow	- Temperature (TL) (Liquidus)	217°C
	- Time (min to max) (Ts)	60 -150 Seconds
Peak Temperature (TP)		260 +0/-5°C
Time within 5°C of actual peak Temperature (TP)		20-40 Seconds
Ramp-down Rate		6°C/Second Max
Time 25°C to peak Temperature (TP)		8 minutes Max
Do not exceed		280°C

Dimensions

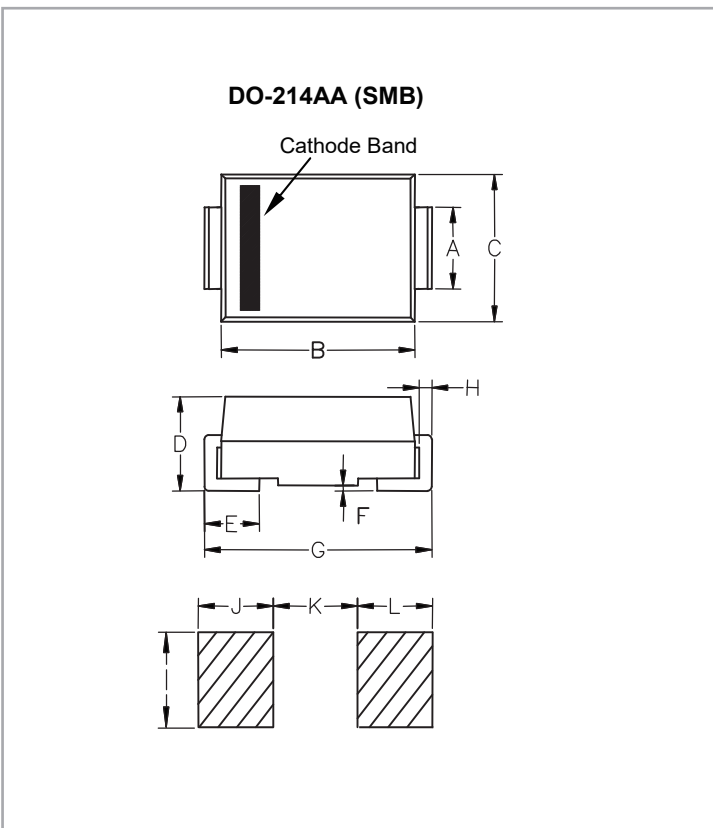


Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.077	0.087	1.960	2.200
B	0.171	0.191	4.350	4.850
C	0.130	0.155	3.300	3.940
D	0.084	0.096	2.130	2.440
E	0.030	0.060	0.750	1.520
F	-	0.008	-	0.203
G	0.201	0.216	5.100	5.500
H	0.006	0.012	0.152	0.305
I	0.089	-	2.260	-
J	0.085	-	2.160	-
K	-	0.107	-	2.740
L	0.085	-	2.160	-

Ordering Information

Part Number	Component Package	Quantity	Packaging Option	Packaging Specification
10SMBJXXXXX	DO-214AA	3,000	Tape & Reel -12mm/13"tape	EIA STD RS-481

Tape and Reel Specifications

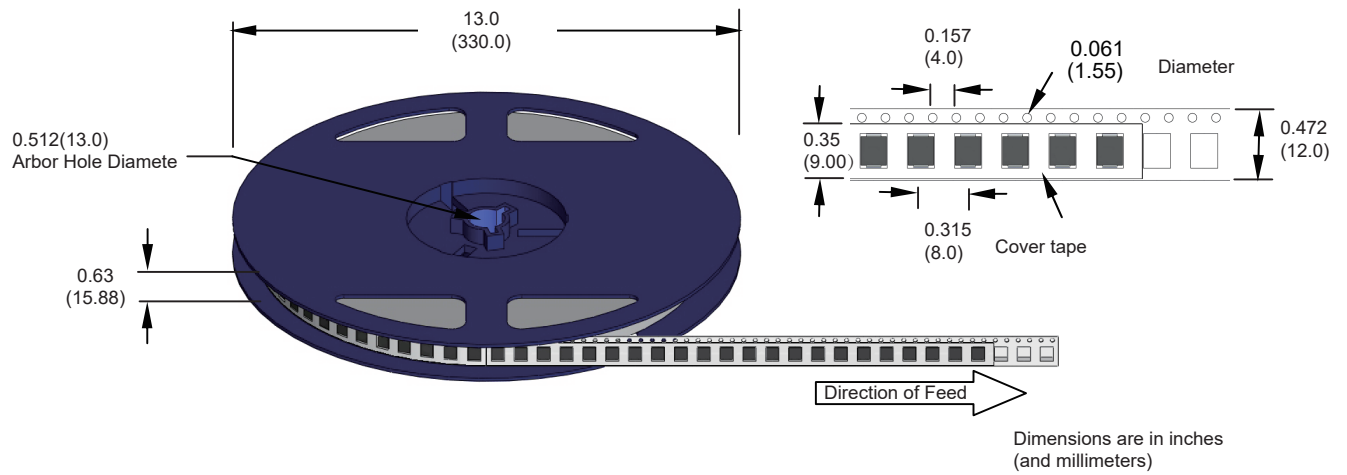

Disclaimer

UNSEMI RESERVES THE RIGHT TO MAKE CHANGE ON OUR PRODUCTS , PRODUCTS SPECIFICATION AND DATA WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

UN SEMICONDUCTOR LIMITED its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "UNSEMI") does not give any representations or warranties for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

In no event shall UNSEMI be liable for any indirect, incidental, punitive, special or consequential damages (including any and all implied warranties, warranties of fitness for particular purpose, non-infringement and merchantability.) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Statements regarding the suitability of products for certain types of applications are based on UNSEMI knowledge of typical requirements that are often placed on UNSEMI products in generic applications. Such statements are not binding, statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify UNSEMI's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise agreed in writing, UNSEMI product is not designed, authorized or warranted to be suitable for use in medical life-saving, or life-sustaining application , nor in applications where failure or malfunction of a UNSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. UNSEMI and its suppliers accept no liability for inclusion or use of UNSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

All referenced brands, product names, service names and trademarks are the property of their respective owners.