



### PNP Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ( $R_1=2.2\text{k}\Omega$ ,  $R_2=47\text{k}\Omega$ )
- For 6-PIN packages: two (galvanic) internal isolated transistors with good matching in one package

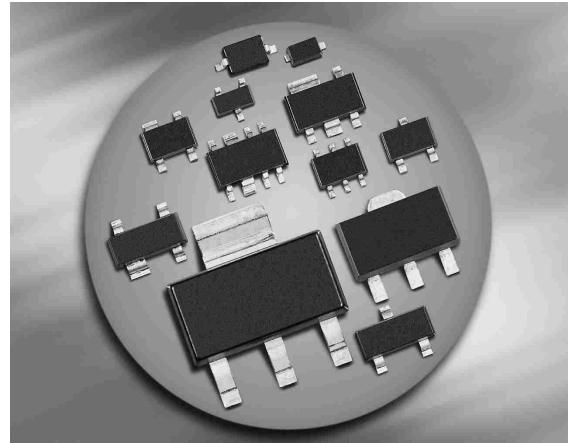

**BCR158/F/L3      SEMB10**  
**BCR158T/W**

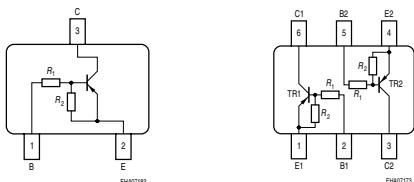

| Type     | Marking | Pin Configuration |      |      |      |      |      | Package |
|----------|---------|-------------------|------|------|------|------|------|---------|
| BCR158   | WIs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | SOT23   |
| BCR158L3 | WI      | 1=B               | 2=E  | 3=C  | -    | -    | -    | TSFP-3  |
| BCR158F  | WIs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | TSFP-3  |
| BCR158T  | WIs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | SC75    |
| BCR158W  | WIs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | SOT323  |
| SEMB10   | W5      | 1=E1              | 2=B1 | 3=C2 | 4=E2 | 5=B2 | 6=C1 | SOT666  |

### Maximum Ratings

| Parameter                                                                                                                                                                                                                                                                    | Symbol      | Value                                  | Unit             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------------------------|------------------|
| Collector-emitter voltage                                                                                                                                                                                                                                                    | $V_{CEO}$   | 50                                     | V                |
| Collector-base voltage                                                                                                                                                                                                                                                       | $V_{CBO}$   | 50                                     |                  |
| Emitter-base voltage                                                                                                                                                                                                                                                         | $V_{EBO}$   | 5                                      |                  |
| Input on voltage                                                                                                                                                                                                                                                             | $V_{i(on)}$ | 10                                     |                  |
| Collector current                                                                                                                                                                                                                                                            | $I_C$       | 100                                    | mA               |
| Total power dissipation-<br>BCR158, $T_S \leq 102^\circ\text{C}$<br>BCR158F, $T_S \leq 128^\circ\text{C}$<br>BCR158L3, $T_S \leq 135^\circ\text{C}$<br>BCR158T, $T_S \leq 109^\circ\text{C}$<br>BCR158W, $T_S \leq 124^\circ\text{C}$<br>SEMB10, $T_S \leq 75^\circ\text{C}$ | $P_{tot}$   | 200<br>250<br>250<br>250<br>250<br>250 | mW               |
| Junction temperature                                                                                                                                                                                                                                                         | $T_j$       | 150                                    | $^\circ\text{C}$ |
| Storage temperature                                                                                                                                                                                                                                                          | $T_{stg}$   | -65 ... 150                            |                  |

### Thermal Resistance

| Parameter                                                                                                 | Symbol     | Value                                                                          | Unit |
|-----------------------------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------|------|
| Junction - soldering point <sup>1)</sup><br>BCR158<br>BCR158F<br>BCR158L3<br>BCR158T<br>BCR158W<br>SEMB10 | $R_{thJS}$ | $\leq 240$<br>$\leq 90$<br>$\leq 60$<br>$\leq 165$<br>$\leq 105$<br>$\leq 300$ | K/W  |


<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**


| Parameter                                                                                         | Symbol                      | Values |       |       | Unit          |
|---------------------------------------------------------------------------------------------------|-----------------------------|--------|-------|-------|---------------|
|                                                                                                   |                             | min.   | typ.  | max.  |               |
| <b>DC Characteristics</b>                                                                         |                             |        |       |       |               |
| Collector-emitter breakdown voltage<br>$I_C = 100 \mu\text{A}, I_B = 0$                           | $V_{(\text{BR})\text{CEO}}$ | 50     | -     | -     | V             |
| Collector-base breakdown voltage<br>$I_C = 10 \mu\text{A}, I_E = 0$                               | $V_{(\text{BR})\text{CBO}}$ | 50     | -     | -     |               |
| Collector-base cutoff current<br>$V_{CB} = 40 \text{ V}, I_E = 0$                                 | $I_{\text{CBO}}$            | -      | -     | 100   | nA            |
| Emitter-base cutoff current<br>$V_{EB} = 5 \text{ V}, I_C = 0$                                    | $I_{\text{EBO}}$            | -      | -     | 164   | $\mu\text{A}$ |
| DC current gain <sup>1)</sup><br>$I_C = 5 \text{ mA}, V_{CE} = 5 \text{ V}$                       | $h_{\text{FE}}$             | 70     | -     | -     | -             |
| Collector-emitter saturation voltage <sup>1)</sup><br>$I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$ | $V_{\text{CEsat}}$          | -      | -     | 0.3   | V             |
| Input off voltage<br>$I_C = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$                                | $V_{i(\text{off})}$         | 0.4    | -     | 0.8   |               |
| Input on voltage<br>$I_C = 2 \text{ mA}, V_{CE} = 0.3 \text{ V}$                                  | $V_{i(\text{on})}$          | 0.5    | -     | 1.1   |               |
| Input resistor                                                                                    | $R_1$                       | 1.5    | 2.2   | 2.9   | k $\Omega$    |
| Resistor ratio                                                                                    | $R_1/R_2$                   | 0.042  | 0.047 | 0.052 | -             |
| <b>AC Characteristics</b>                                                                         |                             |        |       |       |               |
| Transition frequency<br>$I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$          | $f_T$                       | -      | 200   | -     | MHz           |
| Collector-base capacitance<br>$V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$                          | $C_{cb}$                    | -      | 3     | -     | pF            |

<sup>1</sup>Pulse test:  $t < 300\mu\text{s}$ ;  $D < 2\%$


**DC current gain  $h_{FE} = f(I_C)$**   
 $V_{CE} = 5V$  (common emitter configuration)

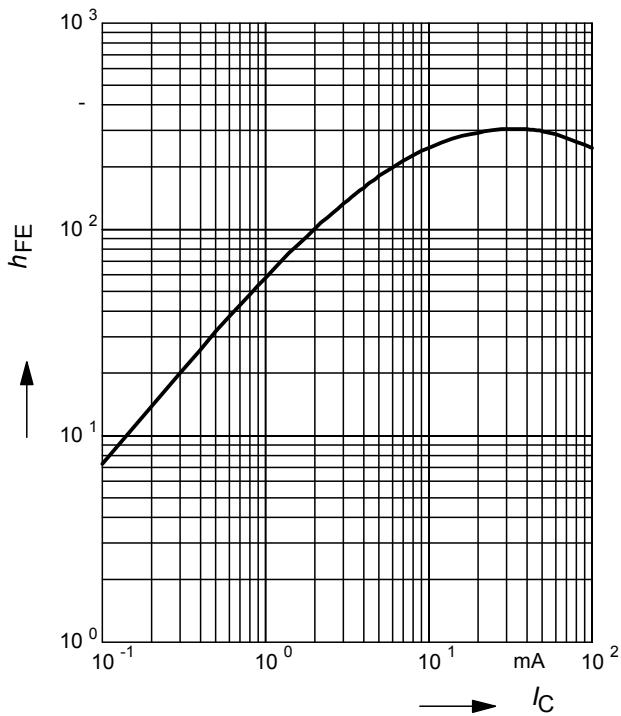


**Input on Voltage  $V_{i(on)} = f(I_C)$**   
 $V_{CE} = 0.3V$  (common emitter configuration)

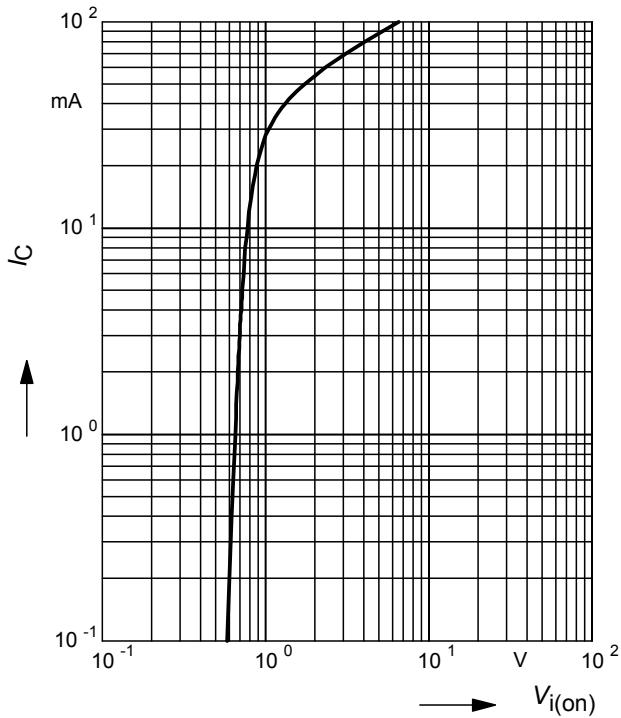


**Collector-emitter saturation voltage**  
 $V_{CEsat} = f(I_C)$ ,  $h_{FE} = 20$

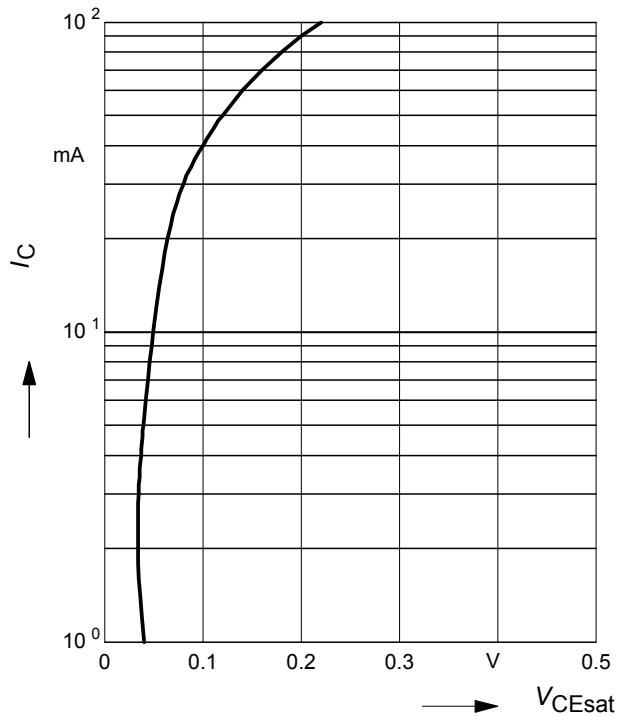


**Input off voltage  $V_{i(off)} = f(I_C)$**   
 $V_{CE} = 5V$  (common emitter configuration)

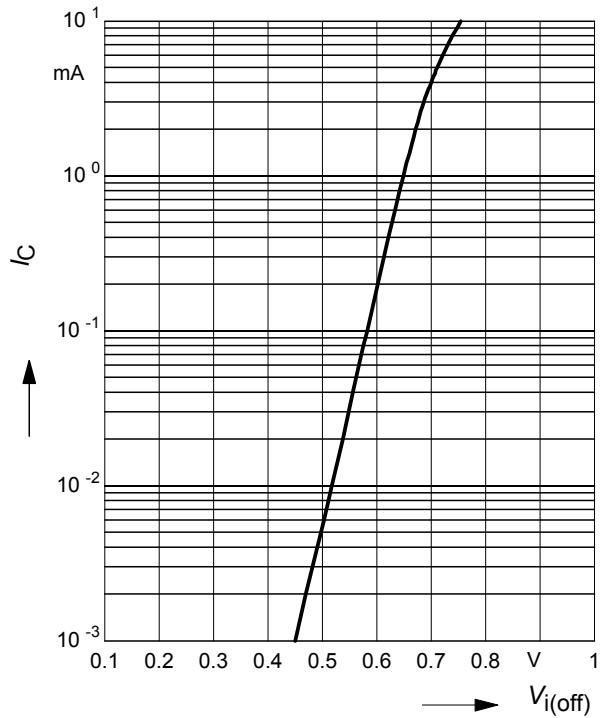


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR158

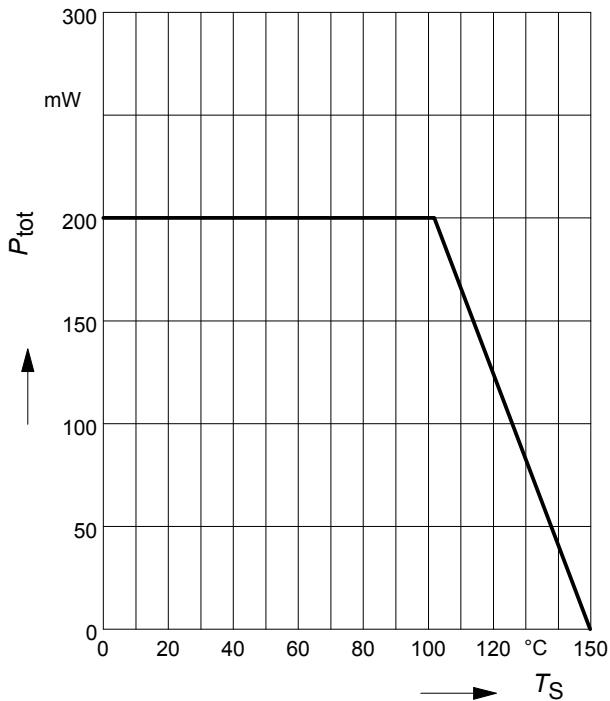


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR158L3

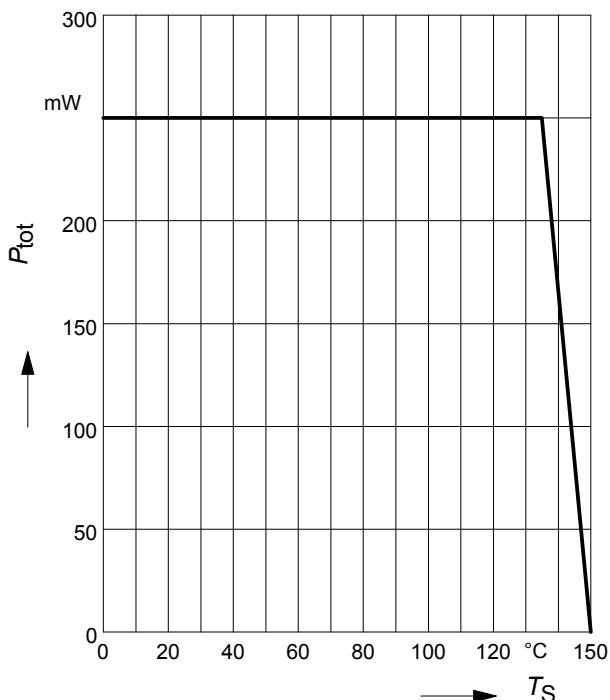


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR158F

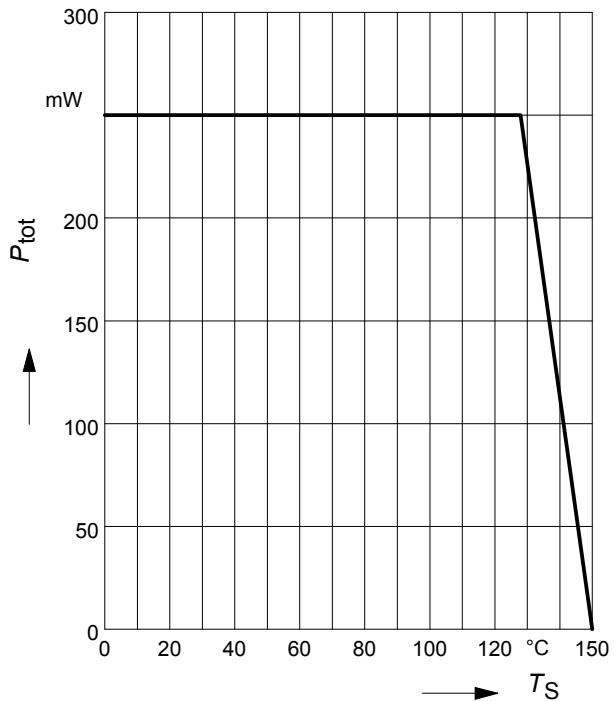


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**   
BCR158T

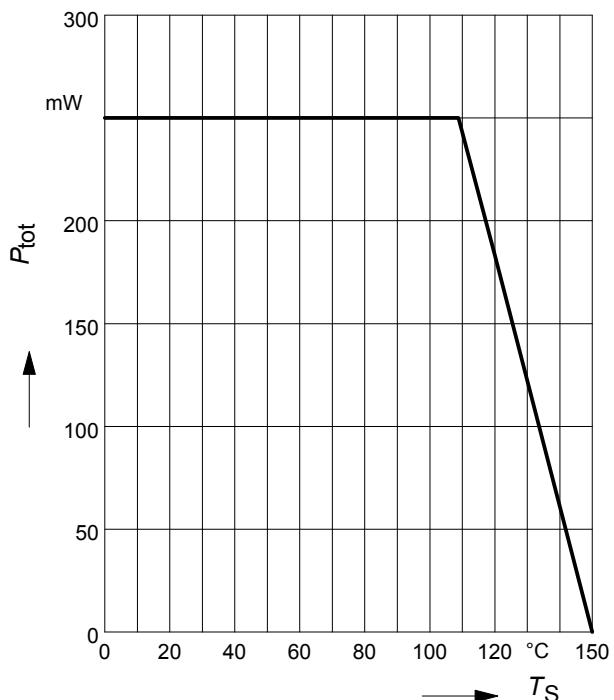


**Total power dissipation**  $P_{\text{tot}} = f(T_S)$   
BCR158W

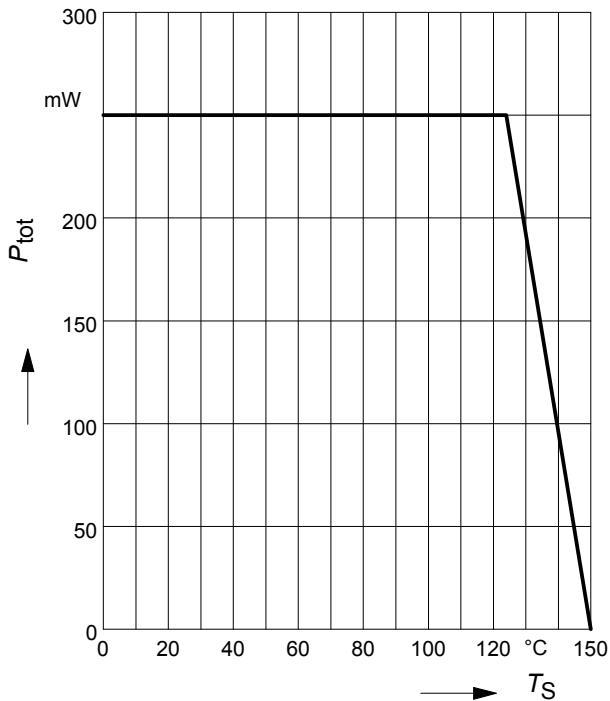


**Total power dissipation**  $P_{\text{tot}} = f(T_S)$   
SEMB10

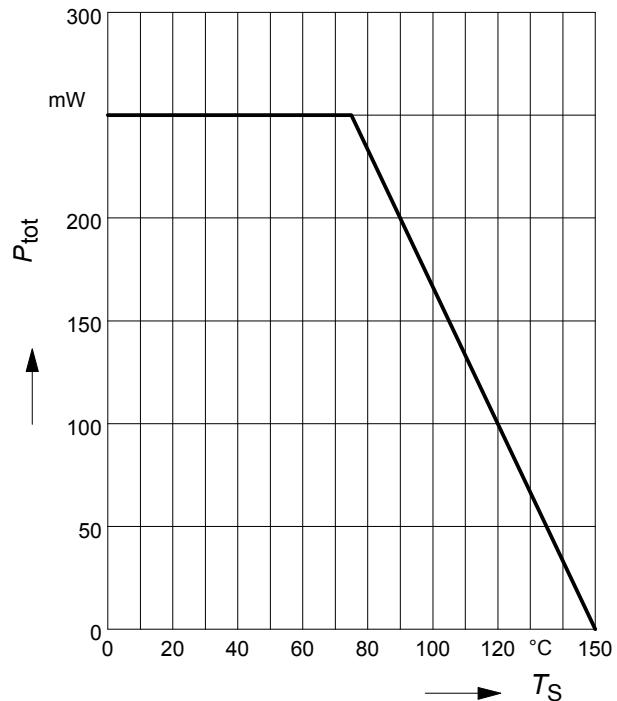

**Permissible Pulse Load**  $R_{\text{thJS}} = f(t_p)$   
BCR158

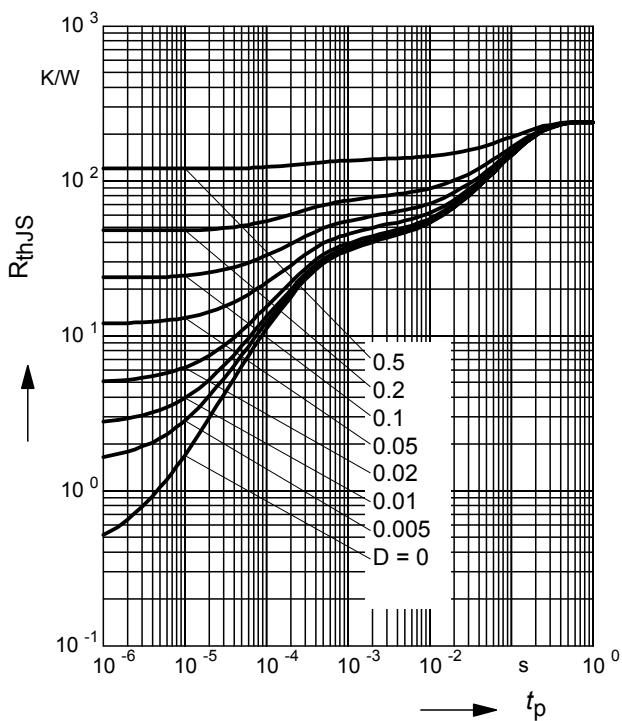


**Permissible Pulse Load**  
 $P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$   
BCR158

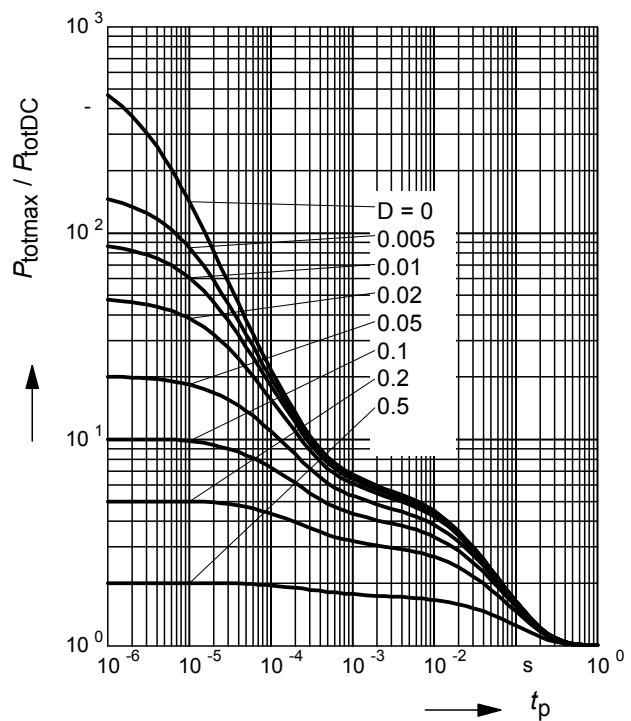


**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 

BCR158F

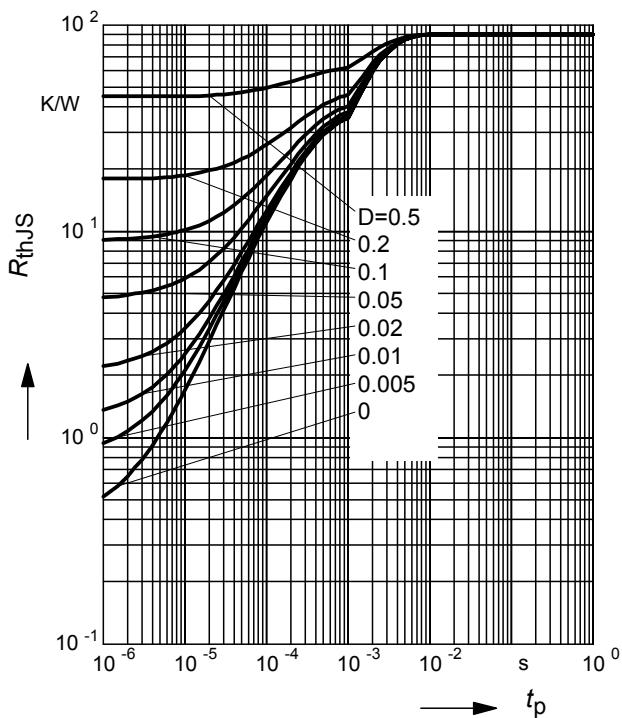

**Permissible Pulse Load**

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR158F

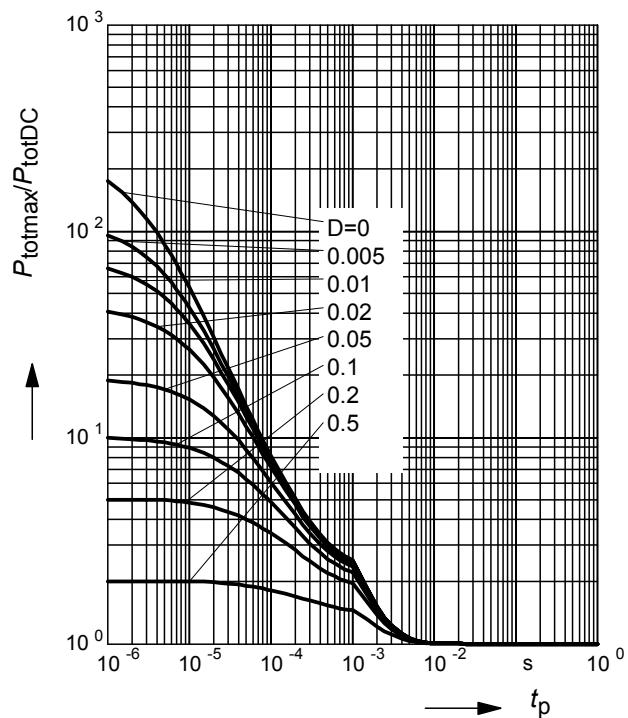

**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 

BCR158L3

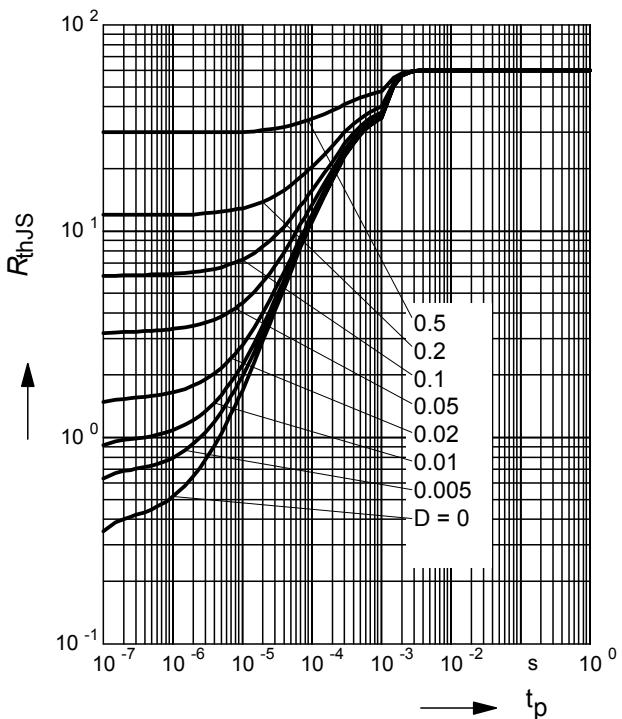
**Permissible Pulse Load**


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR158L3

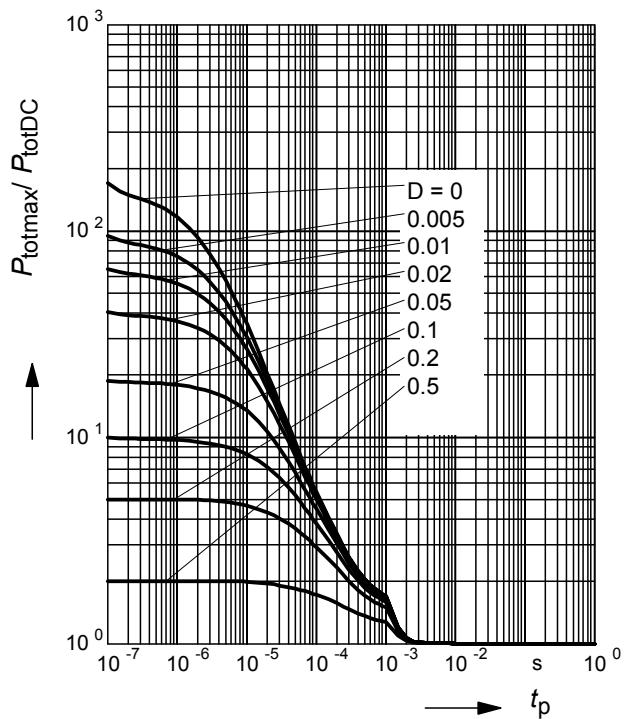


**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 

BCR158T

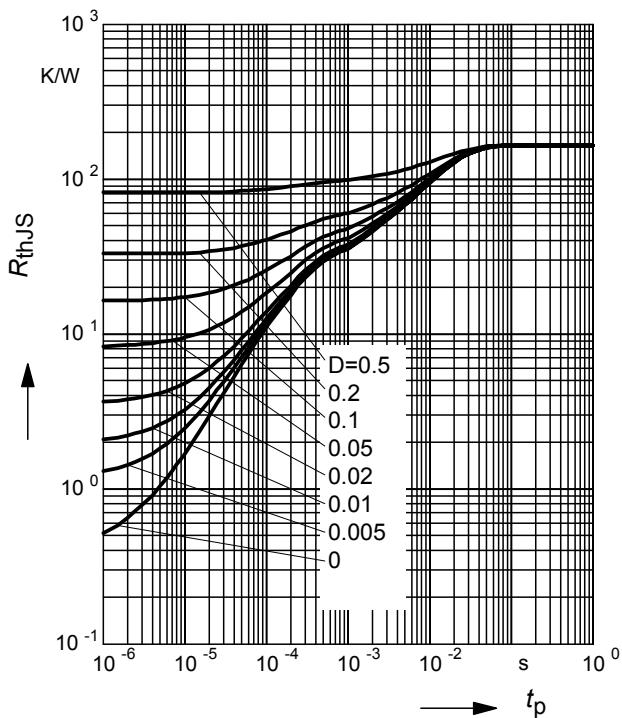

**Permissible Pulse Load**

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR158T

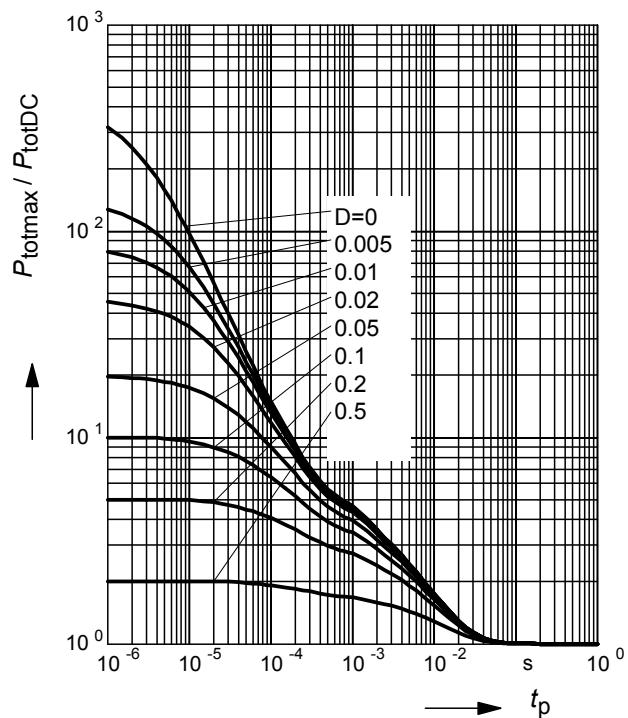

**Permissible Puls Load  $R_{\text{thJS}} = f(t_p)$** 

BCR158W

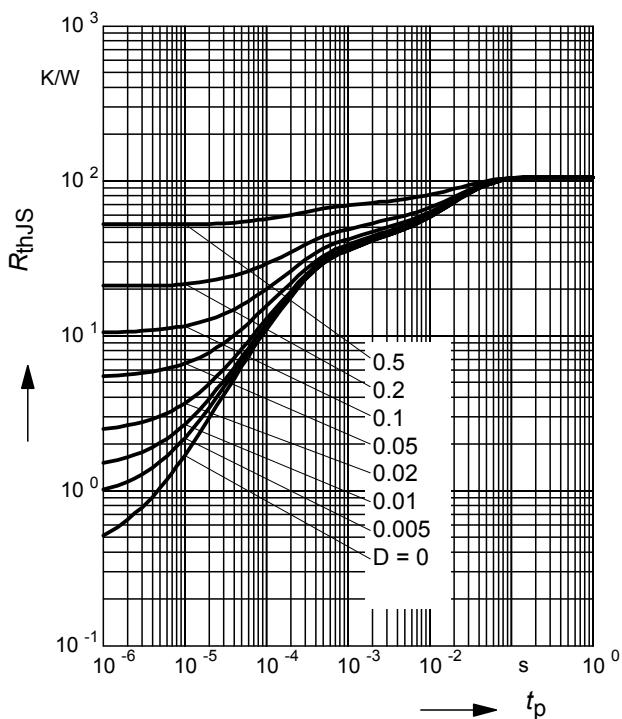
**Permissible Pulse Load**


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR158W

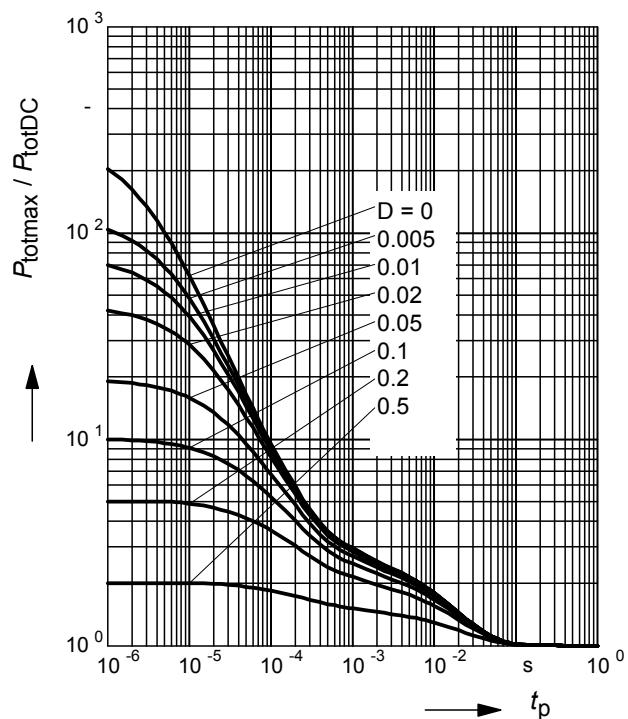

**Permissible Puls Load**  $R_{\text{thJS}} = f(t_p)$

SEMB10

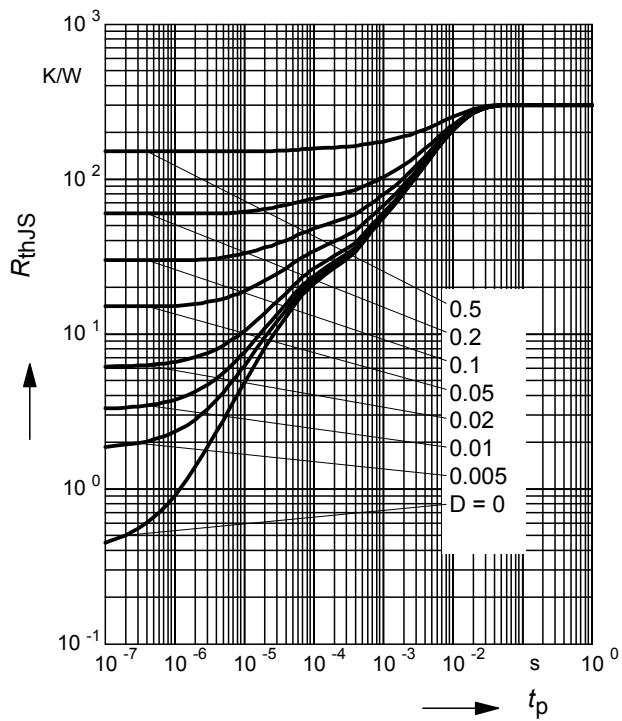

**Permissible Pulse Load**

$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$

SEMB10

