

20KP Series

ROHS

20000W

Surface Mount Transient Voltage Suppressors

Description

The 20KP series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

Features

- ◆ Glass passivated chip
- ◆ 20000W Peak power capability at 10 × 1000µs waveform Repetition rate (duty cycle):0.01%
- ◆ Typical I_R less than 2µA above 40V
- ◆ Low leakage
- ◆ Uni and Bidirectional unit
- ◆ Excellent clamping capability
- ◆ Very fast response time
- ◆ RoHS compliant

Applications

TVS devices are ideal for the protection of I/O interfaces, V_{CC} bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

Mechanical Data

- ◆ Case: Molded plastic
- ◆ Epoxy: UL 94V-0 rate flame retardant
- ◆ Lead: Solderable per MIL-STD-202, method 208 guaranteed
- ◆ Polarity: Color band denotes cathode end except Bipola
- ◆ Mounting position: Any

Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak power dissipation with a 10/1000µs waveform ⁽¹⁾	PPPM	20000	W
Peak pulse current with a 10/1000µs waveform ⁽¹⁾	IPP	See Next Table	A
Power dissipation on infinite heatsink at $T_L = 75^\circ\text{C}$	PD	8.0	W
Peak forward surge current, 8.3 ms single half sine-wave unidirectional only ⁽²⁾	IFSM	500	A
Junction and storage temperature range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$
Operating temperature range	T_{OP}	-40 to +125	$^\circ\text{C}$


Note:

(1) Non-repetitive current pulse per Fig.5 and derated above $T_A = 25^\circ\text{C}$ per Fig.1


(2) Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum



www.unsemi.com.tw

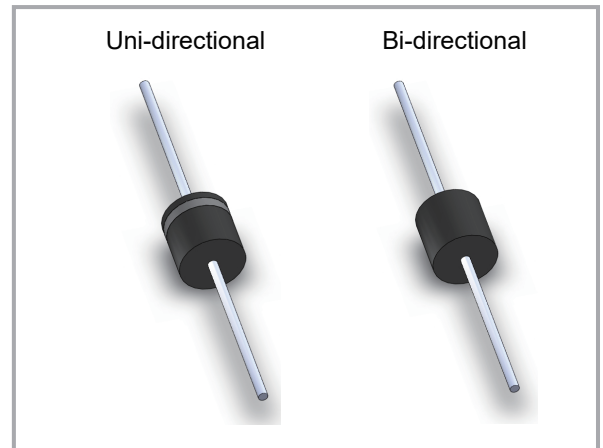

Functional Diagram

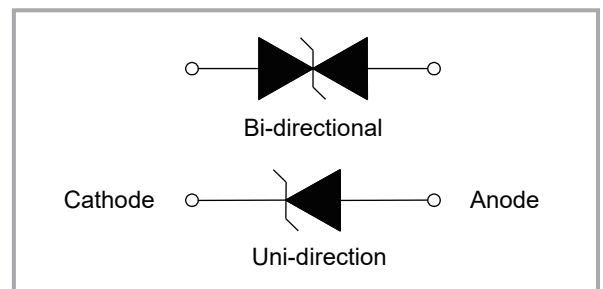

Electrical Characteristics (TA =25°C unless otherwise Specified)

Part Number		Reverse Stand-Off Voltage VRWM (V)	Breakdown Voltage VBR (V) @IT		Test Current IT (mA)	Maximum Clamping Voltage Vc @IPP (V)	Maximum Peak Pulse Current IPP (A)	Maximum Reverse Leakage IR @VRWM (µA)
Uni	Bi		MIN	MAX				
20KP20A	20KP20CA	20	22.34	24.57	50	36.8	548.9	5000
20KP24A	20KP24CA	24	26.81	29.49	50	41.2	490.3	5000
20KP26A	20KP26CA	26	29.04	31.91	50	44.7	451.9	2000
20KP28A	20KP28CA	28	31.28	34.41	50	48.0	420.8	1000
20KP30A	20KP30CA	30	33.51	36.86	5	51.5	392.2	250
20KP32A	20KP32CA	32	35.74	39.31	5	54.3	372.0	150
20KP34A	20KP34CA	34	38.00	41.80	5	57.5	351.3	50
20KP36A	20KP36CA	36	40.20	44.22	5	61.5	328.5	20
20KP40A	20KP40CA	40	44.70	49.17	5	67.8	297.9	15
20KP44A	20KP44CA	44	49.10	54.01	5	72.7	277.9	2
20KP48A	20KP48CA	48	53.60	58.96	5	79.4	254.4	2
20KP52A	20KP52CA	52	58.10	63.91	5	85.8	235.4	2
20KP56A	20KP56CA	56	62.60	68.86	5	92.6	218.1	2
20KP60A	20KP60CA	60	67.00	73.70	5	97.6	207.0	2
20KP64A	20KP64CA	64	71.50	78.65	5	104.0	194.2	2
20KP68A	20KP68CA	68	76.00	83.60	5	110.0	183.6	2
20KP72A	20KP72CA	72	80.40	88.44	5	116.0	174.1	2
20KP80A	20KP80CA	80	89.40	98.34	5	130.0	155.4	2
20KP88A	20KP88CA	88	98.30	108.13	5	142.0	142.3	2
20KP96A	20KP96CA	96	107.20	117.92	5	155.0	130.3	2
20KP104A	20KP104CA	104	116.20	127.82	5	168.0	120.2	2
20KP112A	20KP112CA	112	125.10	137.61	5	182.0	111.0	2
20KP120A	20KP120CA	120	134.00	147.40	5	194.0	104.1	2
20KP132A	20KP132CA	132	147.40	162.40	5	213.0	94.8	2
20KP144A	20KP144CA	144	160.80	176.88	5	232.0	87.1	2
20KP160A	20KP160CA	160	178.70	196.57	5	258.0	78.3	2
20KP172A	20KP172CA	172	192.10	211.31	5	277.0	72.9	2
20KP180A	20KP180CA	180	201.10	221.21	5	291.0	69.4	2
20KP192A	20KP192CA	192	214.50	235.95	5	309.0	65.4	2
20KP204A	20KP204CA	204	227.90	250.96	5	329.0	61.4	2
20KP216A	20KP216CA	216	241.30	265.43	5	348.0	58.0	2
20KP232A	20KP232CA	232	259.10	285.01	5	374.0	54.0	2
20KP240A	20KP240CA	240	268.10	294.91	5	387.0	52.2	2
20KP256A	20KP256CA	256	286.00	314.60	5	412.0	49.0	2
20KP280A	20KP280CA	280	312.80	344.08	5	451.0	44.8	2
20KP300A	20KP300CA	300	335.10	368.61	5	483.0	41.8	2

Note:

(1) Add suffix ' CA ' after part number to specify Bi-directional devices ; (2) Suffix ' A ' denotes 5% tolerance device

Ratings and Characteristic Curves (TA =25°C unless otherwise noted)

Figure 1 - Peak Pulse Power Rating Curve

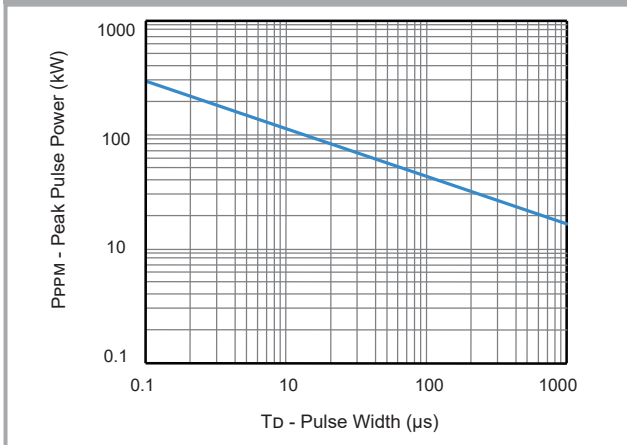


Figure 2 - Pulse Derating Curve

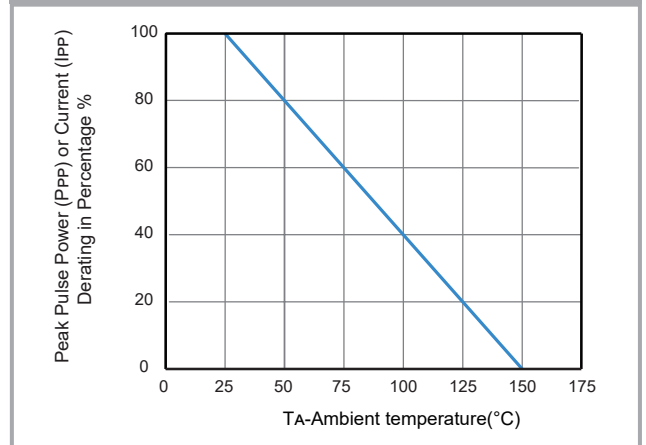


Figure 3 - Pulse Waveform

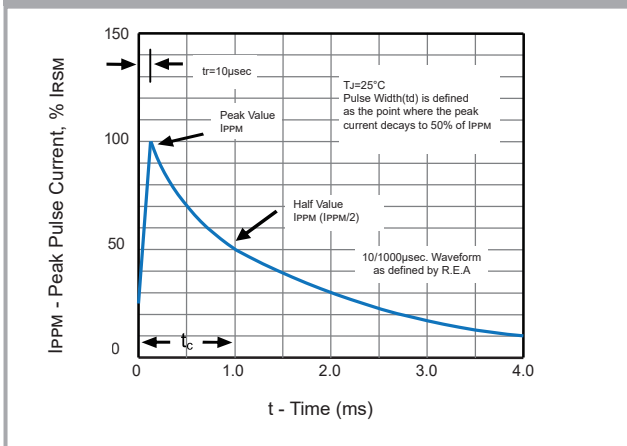


Figure 4 - Typical Junction Capacitance

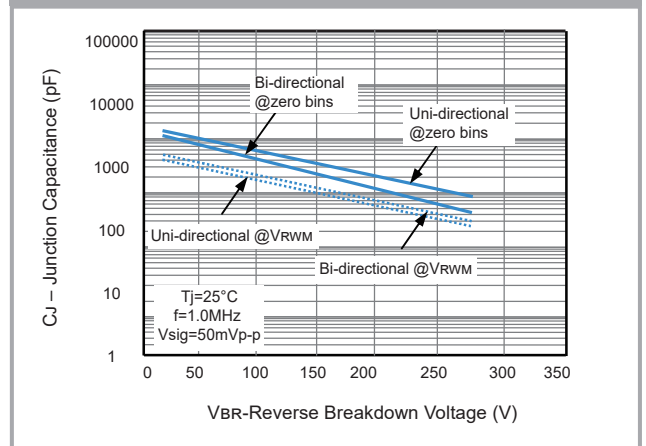


Figure 5 - Steady State Power Derating Curve




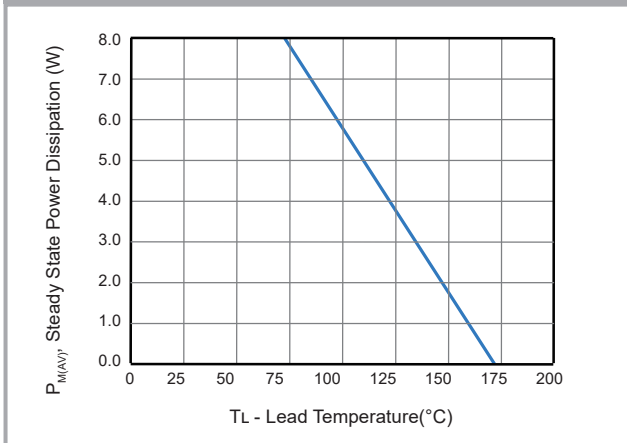


Figure 6 - Maximum Non-Repetitive Surge Current

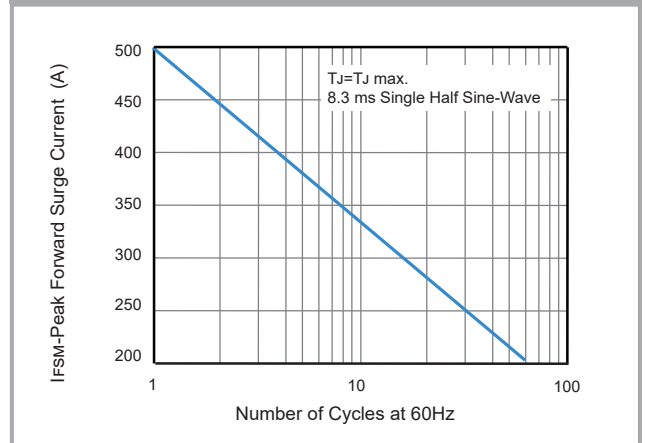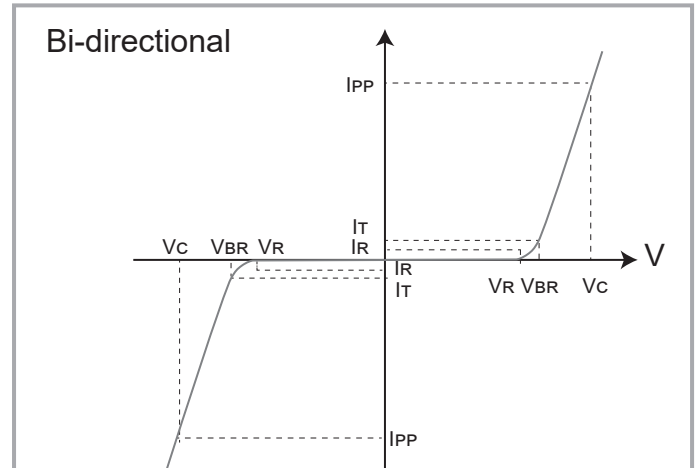

I-V Curve Characteristics

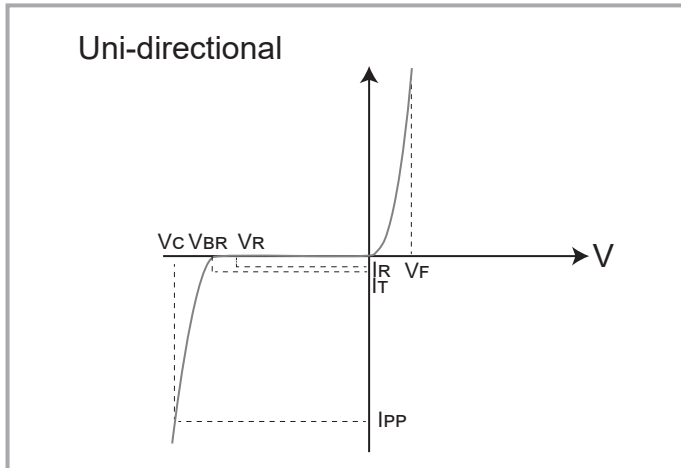


Physical Specifications

Weight	0.07 ounce, 2.1 gram
Case	JEDEC R6/P600 Molded Plasticover glass passivated junction
Polarity	Color band denotes cathode except Bipolar
Terminal	Matte Tin-plated leads, Solderable per JESD22-B102D

Environmental Specifications


Temperature Cycle	JESD22-A104
Pressure Cooker	JESD22-A102
High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Thermal Shock	JESD22-A106

Soldering Parameters

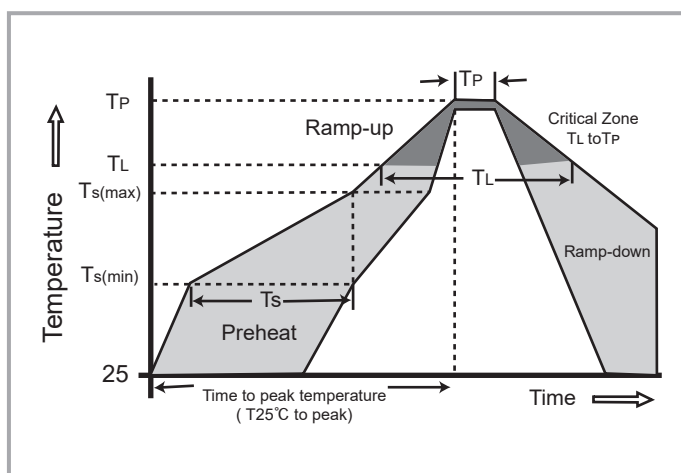


Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min (Ts(min))	150°C
	-Temperature Max (Ts(max))	200°C
	- Time (min to max) (ts)	60 -180 Seconds
Average ramp up rate (Liquidus Temp TL) to peak		3°C/second max
TS(max) to TL - Ramp-up Rate		3°C/second max
Reflow	- Temperature (TL) (Liquidus)	217°C
	- Time (min to max) (ts)	60 -150 Seconds
Peak Temperature (TP)		260 +0/-5°C
Time within 5°C of actual peak Temperature (tp)		20 -40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (TP)		8 minutes Max
Do not exceed		280°C

Dimensions

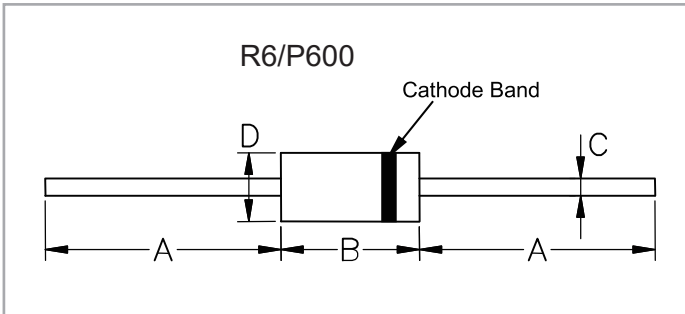

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	1.000	-	25.4	-
B	0.340	0.360	8.64	9.14
C	0.048	0.052	1.22	1.32
D	0.340	0.360	8.64	9.14


Part Numbering

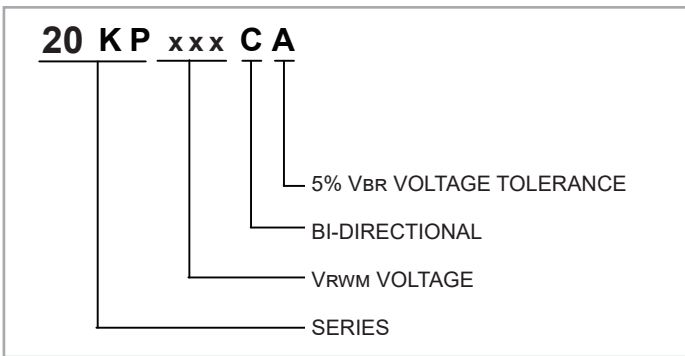

Ordering Information

Part Number	Component Package	Quantity	Packaging Option
20KPXXXXX	R6/P600	250	Box

Packaging Dimensions Unit: Inches (Millimeters)

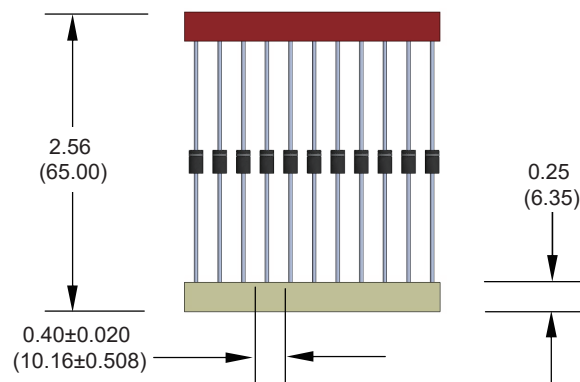

Disclaimer

UNSEMI RESERVES THE RIGHT TO MAKE CHANGE ON OUR PRODUCTS , PRODUCTS SPECIFICATION AND DATA WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

UN SEMICONDUCTOR LIMITED its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "UNSEMI") does not give any representations or warranties for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

In no event shall UNSEMI be liable for any indirect, incidental, punitive, special or consequential damages (including any and all implied warranties, warranties of fitness for particular purpose, non-infringement and merchantability.) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Statements regarding the suitability of products for certain types of applications are based on UNSEMI knowledge of typical requirements that are often placed on UNSEMI products in generic applications. Such statements are not binding, statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify UNSEMI's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise agreed in writing, UNSEMI product is not designed, authorized or warranted to be suitable for use in medical life-saving, or life-sustaining application , nor in applications where failure or malfunction of a UNSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. UNSEMI and its suppliers accept no liability for inclusion or use of UNSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

All referenced brands, product names, service names and trademarks are the property of their respective owners.