




PNP Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ($R_1 = 10k\Omega$, $R_2 = 10k\Omega$)
- For 6-PIN packages: two (galvanic) internal isolated transistors with good matching in one package

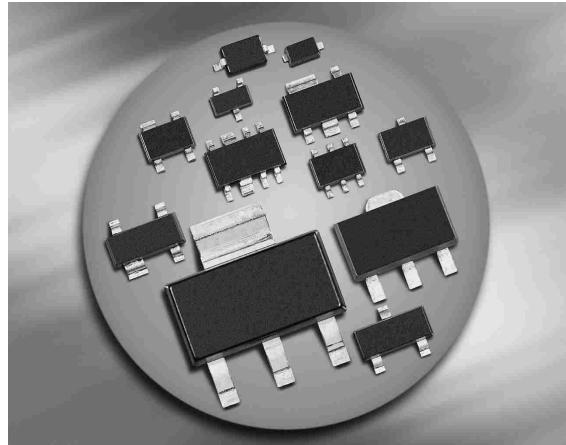

BCR183/F/L3
BCR183T/W

BCR183S
BCR183U



Type	Marking	Pin Configuration						Package
BCR183	WMs	1=B	2=E	3=C	-	-	-	SOT23
BCR183F	WMs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR183L3	WM	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR183S	WMs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363
BCR183T	WMs	1=B	2=E	3=C	-	-	-	SC75
BCR183U	WMs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SC74
BCR183W	WMs	1=B	2=E	3=C	-	-	-	SOT323

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Emitter-base voltage	V_{EBO}	10	
Input on voltage	$V_{i(on)}$	20	
Collector current	I_C	100	mA
Total power dissipation- BCR183, $T_S \leq 102^\circ\text{C}$ BCR183F, $T_S \leq 128^\circ\text{C}$ BCR183L3, $T_S \leq 135^\circ\text{C}$ BCR183S, $T_S \leq 115^\circ\text{C}$ BCR183T, $T_S \leq 109^\circ\text{C}$ BCR183U, $T_S \leq 118^\circ\text{C}$ BCR183W, $T_S \leq 124^\circ\text{C}$	P_{tot}	200 250 250 250 250 250 250	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ BCR183 BCR183F BCR183L3 BCR183S BCR183T BCR183U BCR183W	R_{thJS}	≤ 240 ≤ 90 ≤ 60 ≤ 140 ≤ 165 ≤ 133 ≤ 105	K/W


¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Collector-base cutoff current $V_{CB} = 40 \text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
Emitter-base cutoff current $V_{EB} = 10 \text{ V}, I_C = 0$	I_{EBO}	-	-	0,75	mA
DC current gain ¹⁾ $I_C = 5 \text{ mA}, V_{CE} = 5 \text{ V}$	h_{FE}	30	-	-	-
Collector-emitter saturation voltage ¹⁾ $I_C = 10 \text{ mA}, I_B = 0,5 \text{ mA}$	V_{CEsat}	-	-	0,3	V
Input off voltage $I_C = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$	$V_{i(\text{off})}$	0,8	-	1,8	
Input on voltage $I_C = 2 \text{ mA}, V_{CE} = 0,3 \text{ V}$	$V_{i(\text{on})}$	1	-	2,5	
Input resistor	R_1	7	10	13	kΩ
Resistor ratio	R_1/R_2	0,9	1	1,1	-
AC Characteristics					
Transition frequency $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	f_T	-	200	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{cb}	-	3	-	pF

¹Pulse test: $t < 300\mu\text{s}$; $D < 2\%$


DC current gain $h_{FE} = f(I_C)$
 $V_{CE} = 5 \text{ V}$ (common emitter configuration)

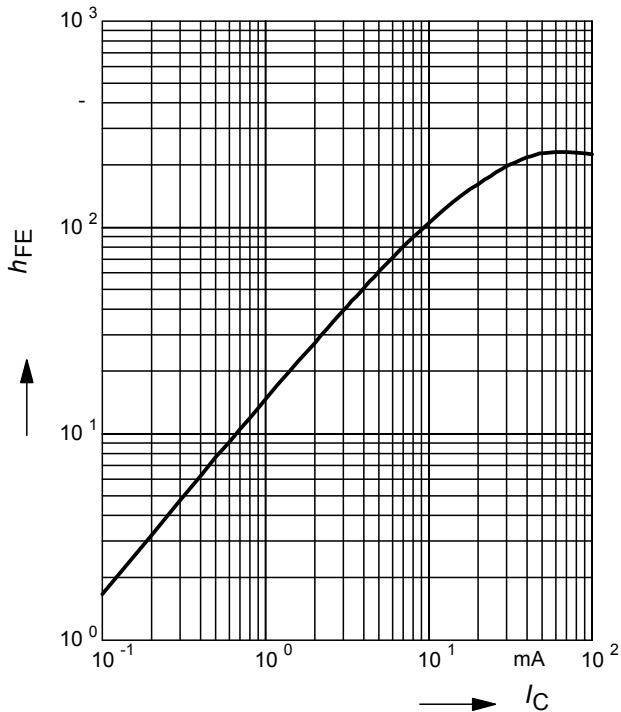


Input on Voltage $V_{i(on)} = f(I_C)$
 $V_{CE} = 0.3 \text{ V}$ (common emitter configuration)

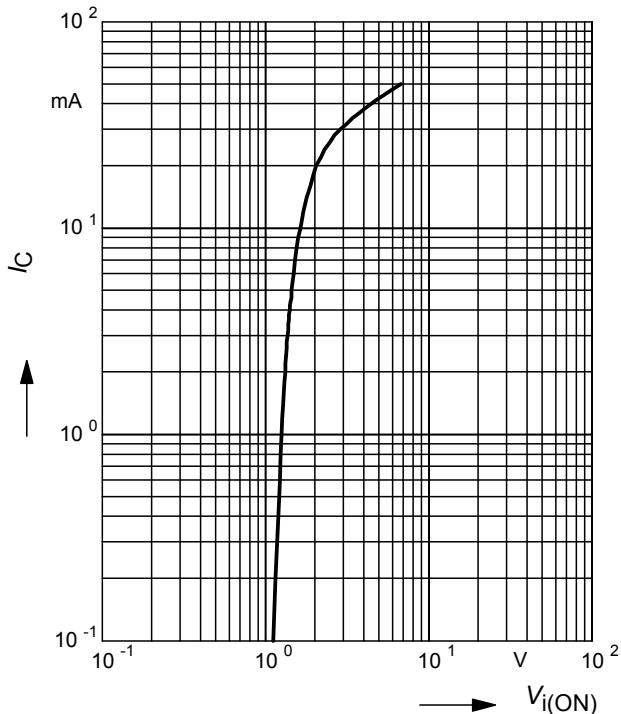


Collector-emitter saturation voltage
 $V_{CEsat} = f(I_C)$, $h_{FE} = 20$

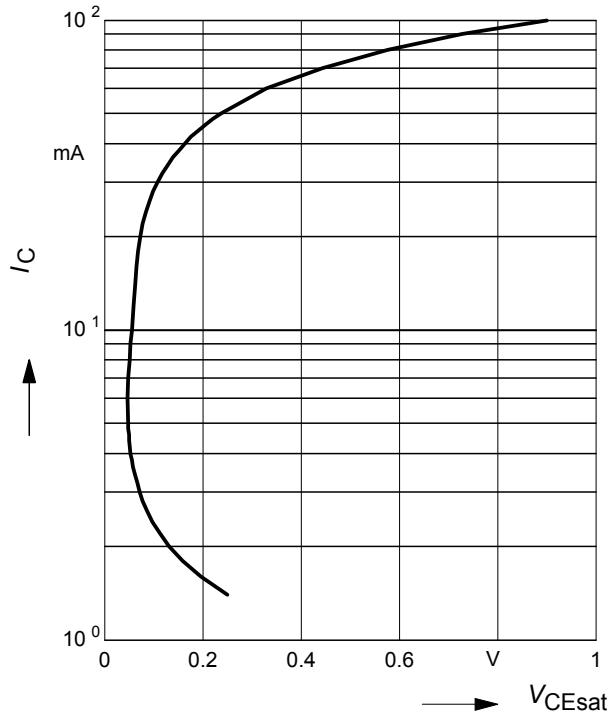


Input off voltage $V_{i(off)} = f(I_C)$
 $V_{CE} = 5 \text{ V}$ (common emitter configuration)

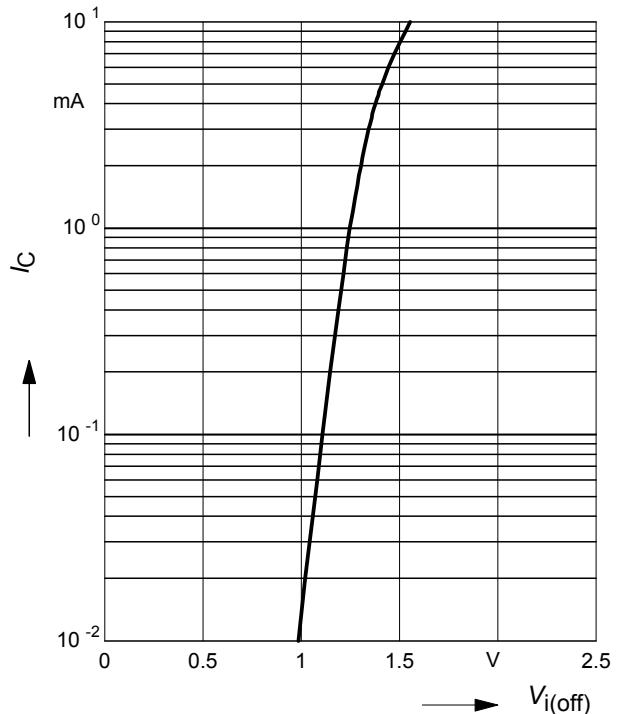


Total power dissipation $P_{\text{tot}} = f(T_S)$
BCR183

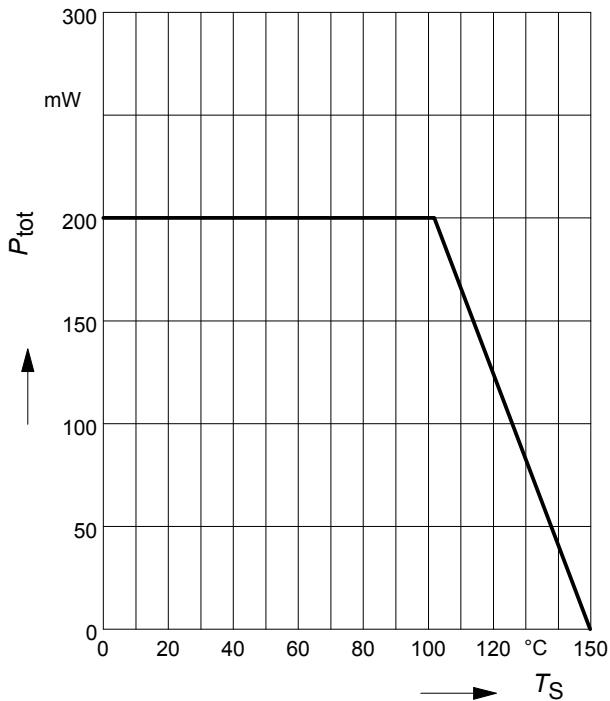


Total power dissipation $P_{\text{tot}} = f(T_S)$
BCR183L3

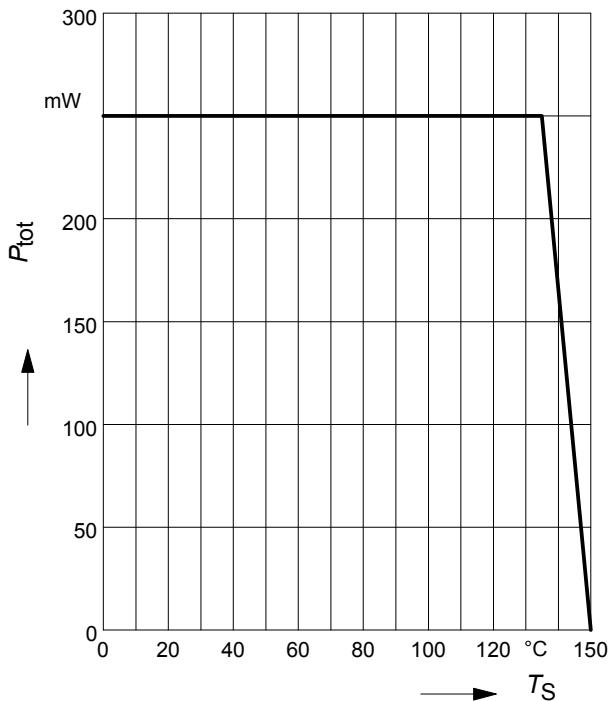


Total power dissipation $P_{\text{tot}} = f(T_S)$
BCR183F

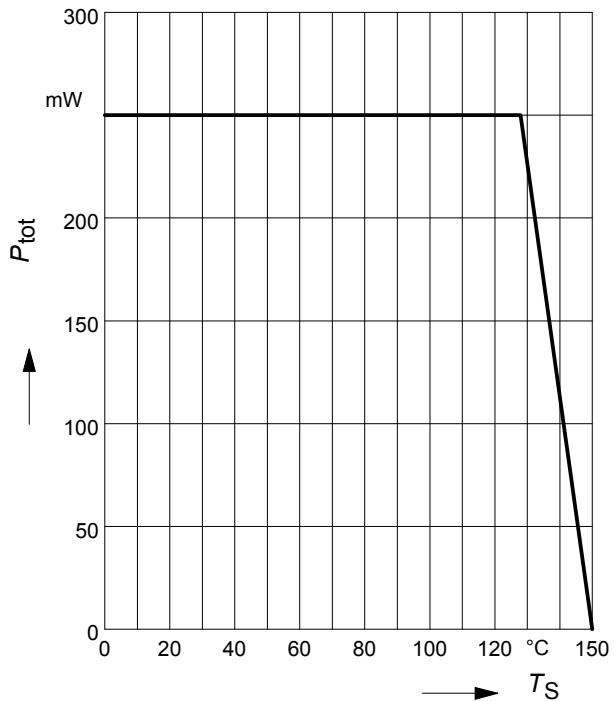


Total power dissipation $P_{\text{tot}} = f(T_S)$
BCR183S

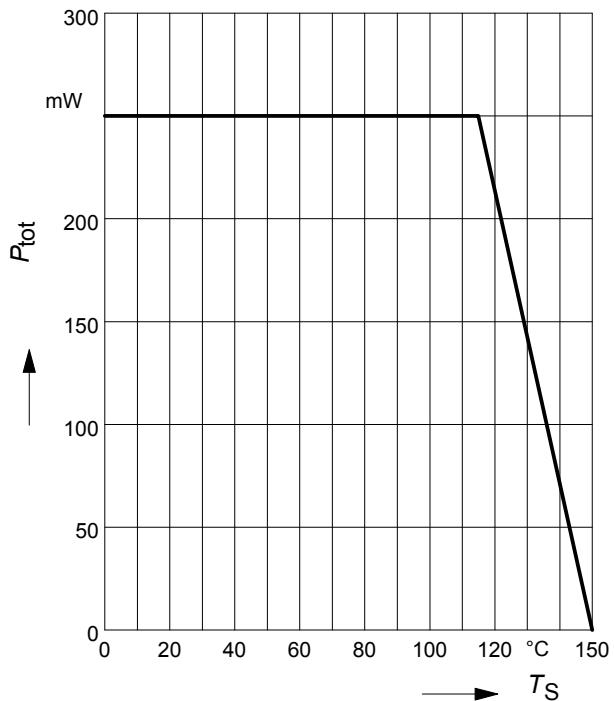


Total power dissipation $P_{\text{tot}} = f(T_S)$
BCR183T

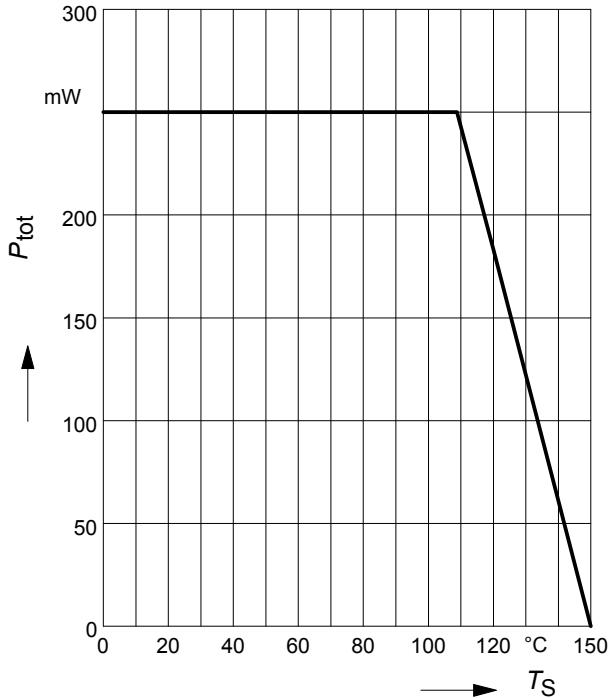


Total power dissipation $P_{\text{tot}} = f(T_S)$
BCR183W

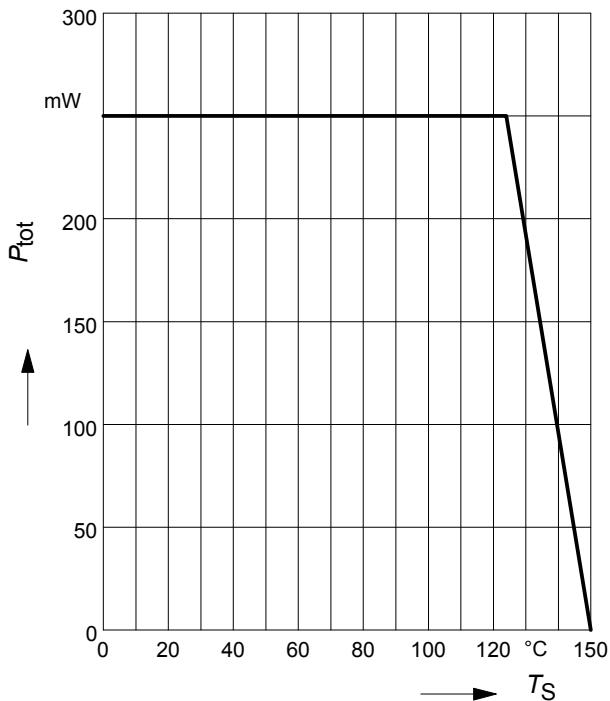

Total power dissipation $P_{\text{tot}} = f(T_S)$
BCR183U

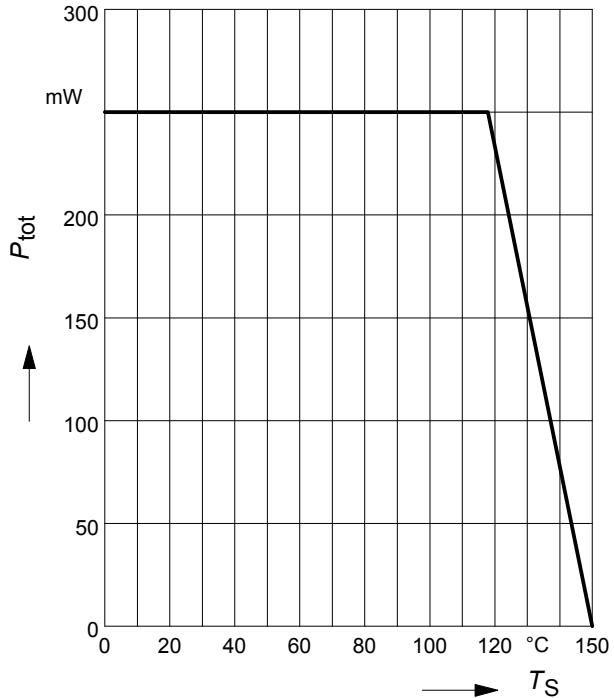


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$
BCR183

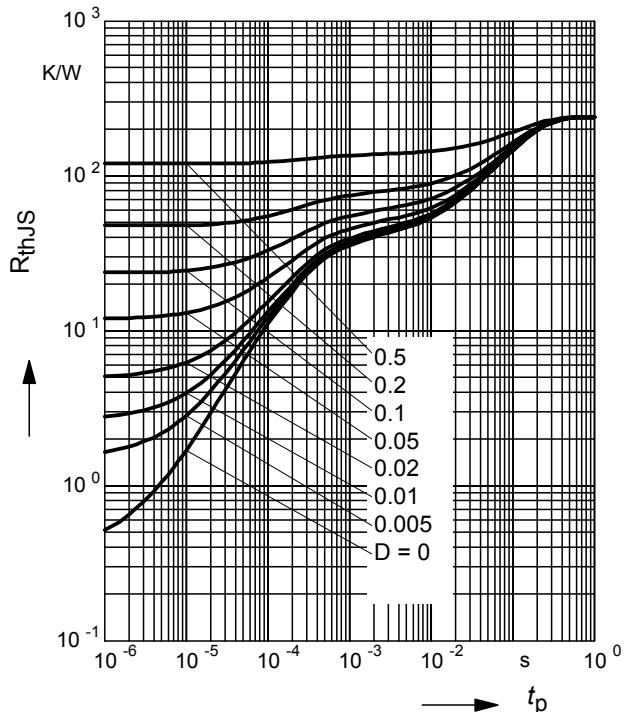

Permissible Pulse Load


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR183

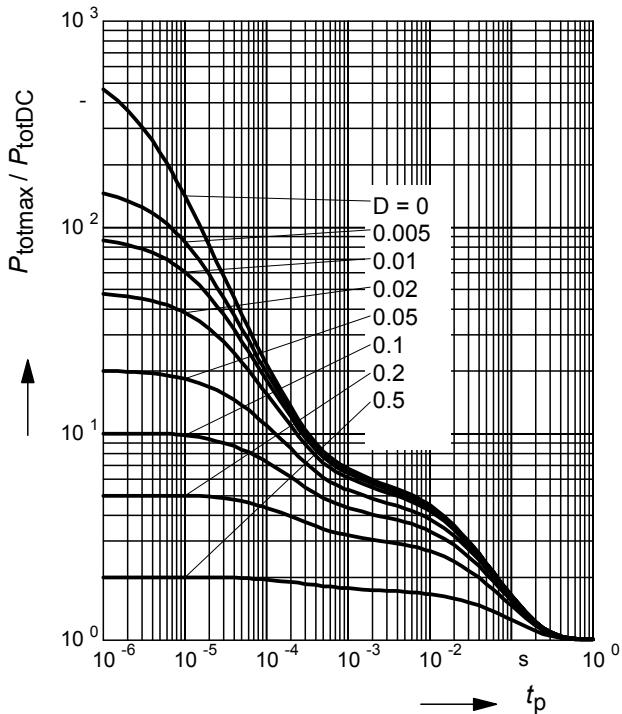

Permissible Pulse Load

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$


BCR183F

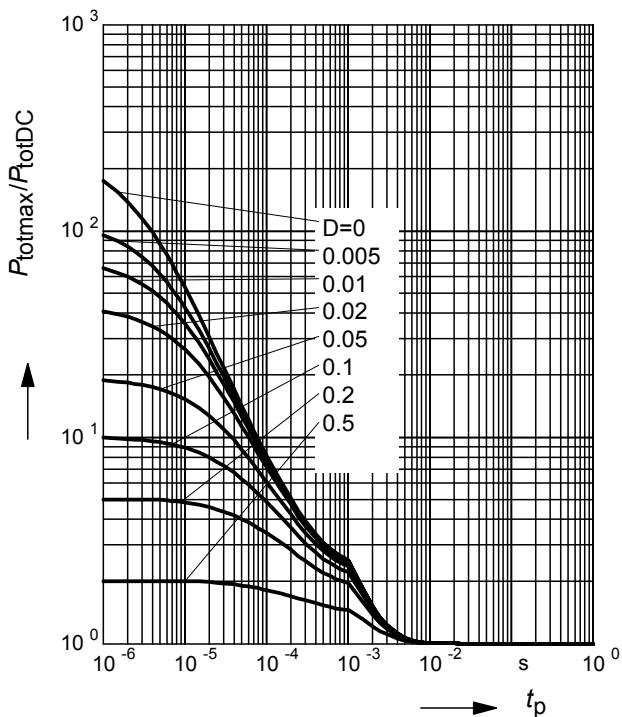
Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BCR183F

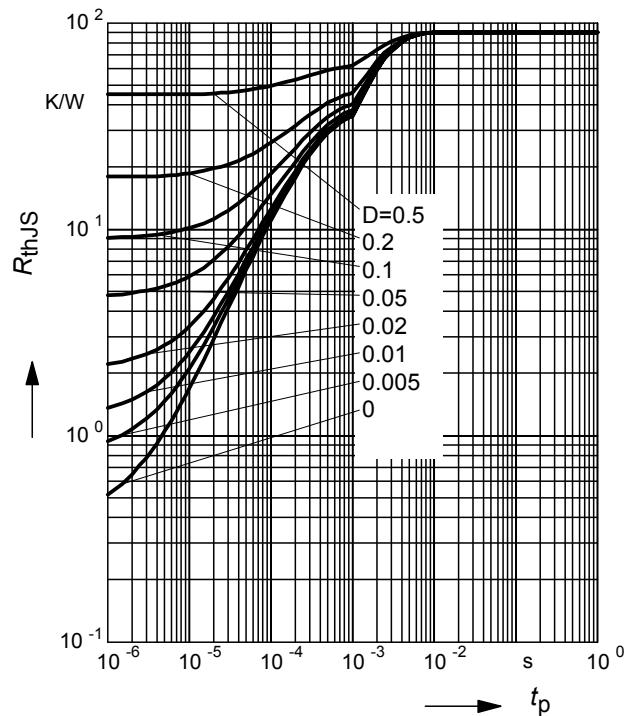
Permissible Puls Load $R_{\text{thJS}} = f(t_p)$


BCR183L3

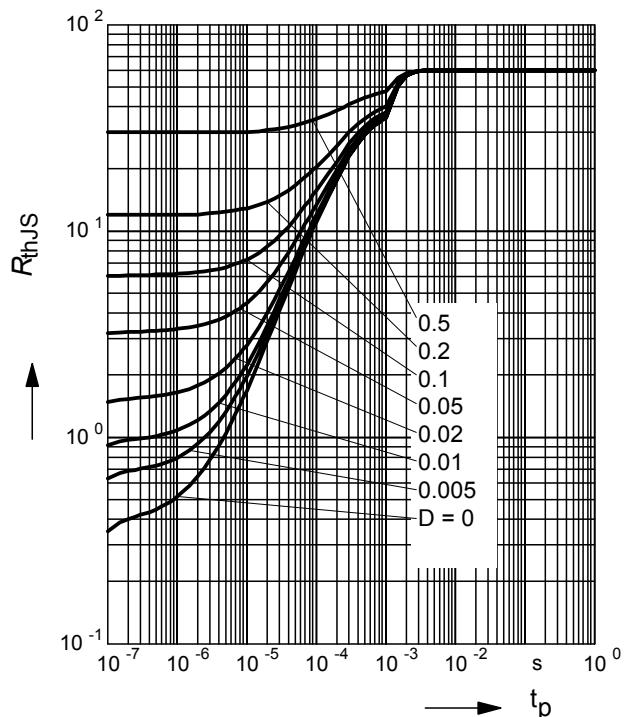

Permissible Pulse Load


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR183L3

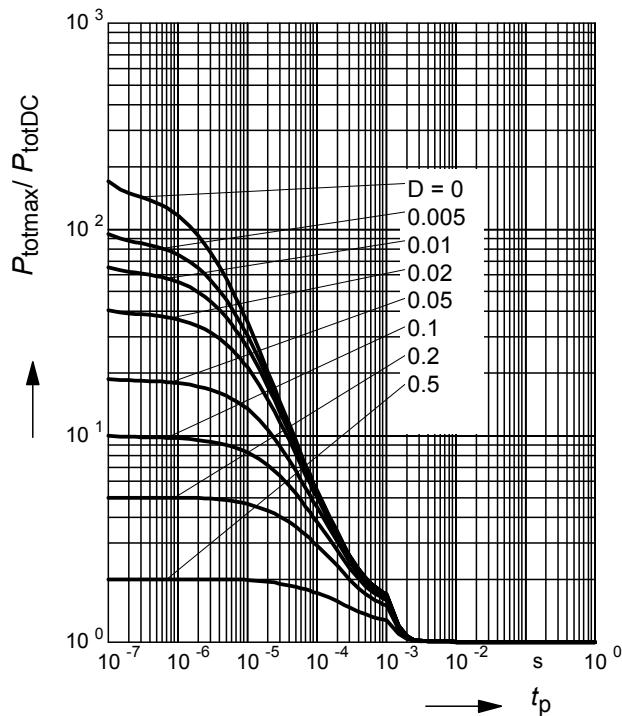

Permissible Pulse Load

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$


BCR183S

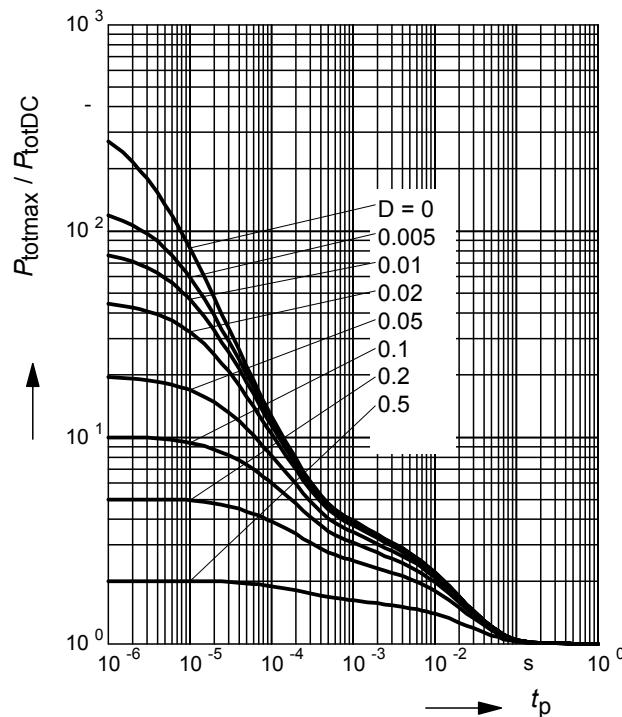
Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BCR183S

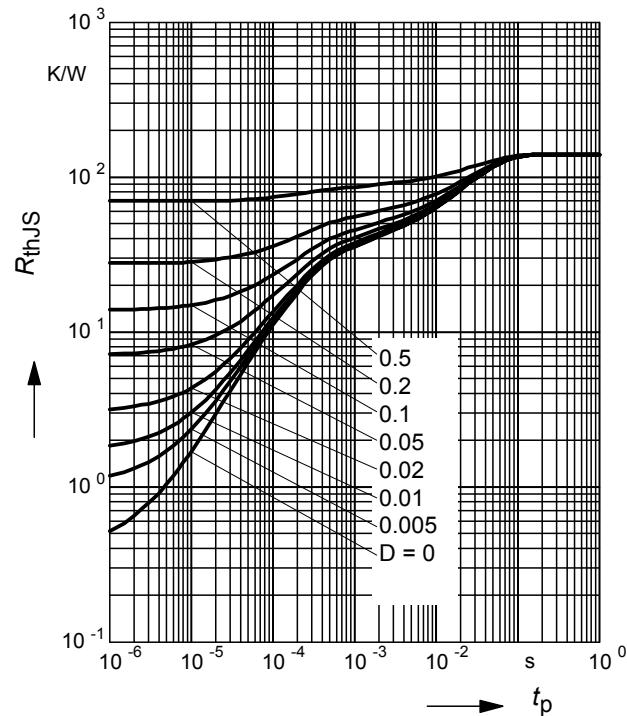
Permissible Puls Load $R_{\text{thJS}} = f(t_p)$


BCR183T

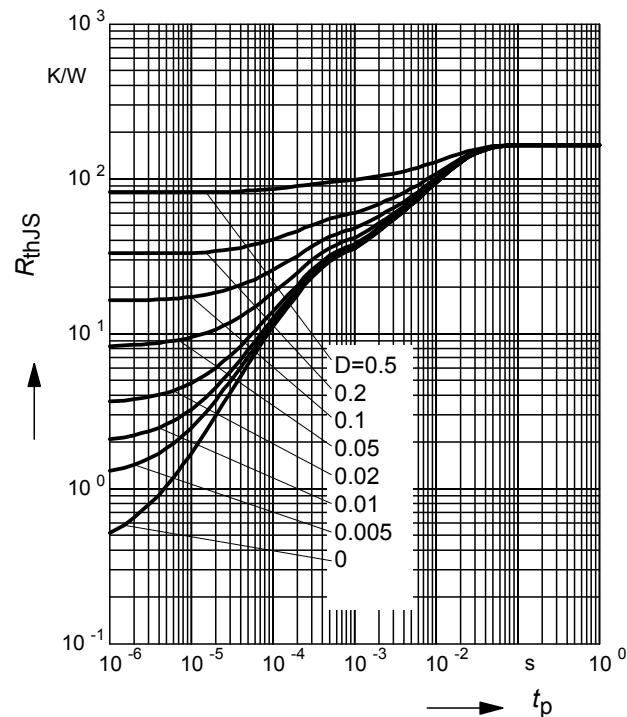

Permissible Pulse Load


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR183T

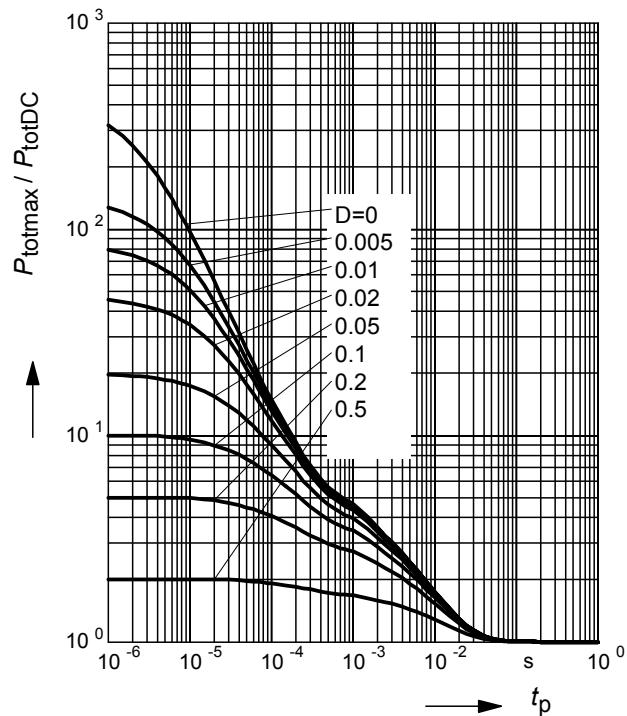

Permissible Pulse Load

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$


BCR185U

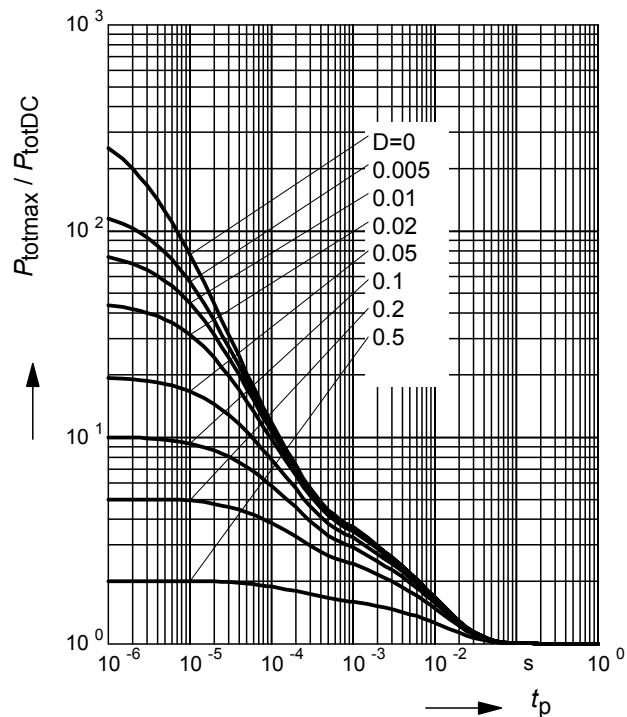
Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BCR183U

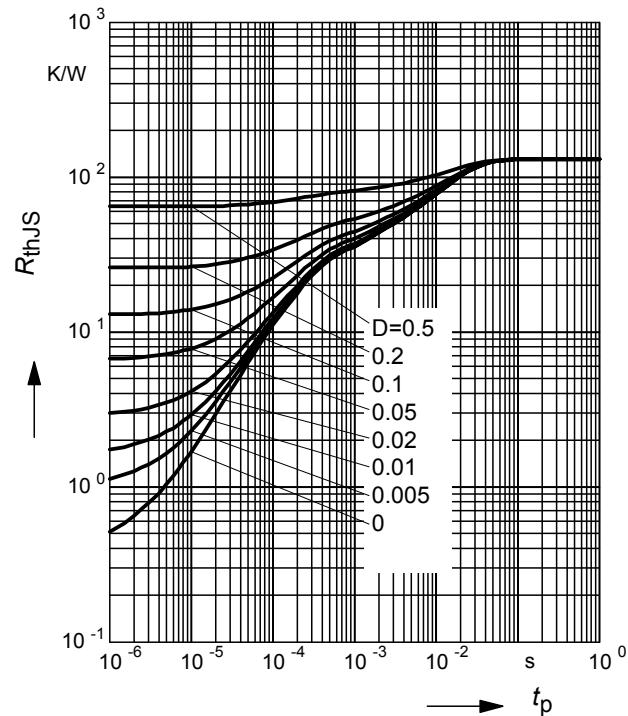
Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BCR183W

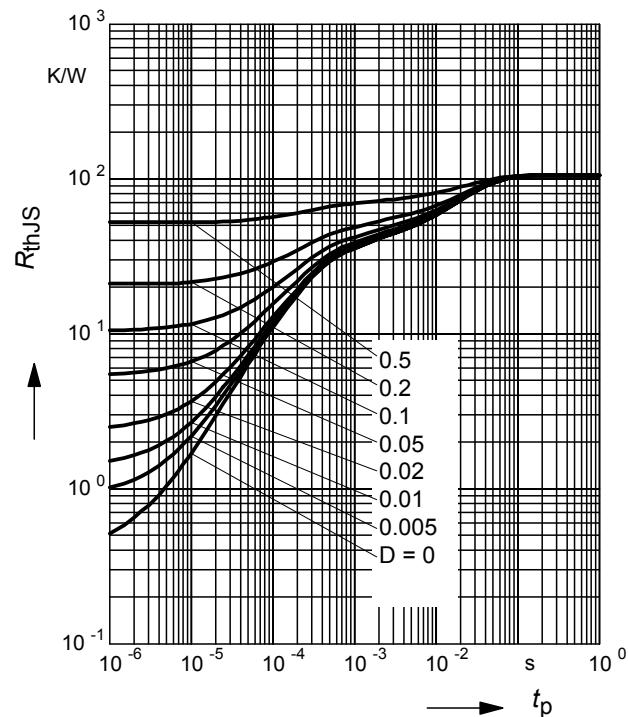

Permissible Pulse Load

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR183W

