


## NPN Silicon AF Transistors

**BCW 60  
BCX 70**

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage
- Low noise between 30 Hz and 15 kHz
- Complementary types: BCW 61, BCX 71 (PNP)

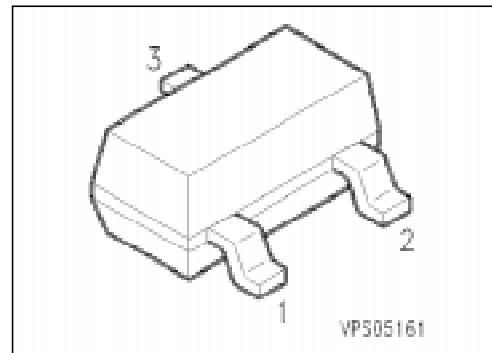

Type	Marking	Ordering Code (tape and reel)	Pin Configuration			Package <sup>1)</sup>
			1	2	3	
BCW 60 A	AAs	Q62702-C1517	B	E	C	SOT-23
BCW 60 B	ABs	Q62702-C1497				
BCW 60 C	ACs	Q62702-C1476				
BCW 60 D	ADs	Q62702-C1477				
BCW 60 FF	AFs	Q62702-C1529				
BCW 60 FN	ANs	Q62702-C1567				
BCX 70 G	AGs	Q62702-C1539				
BCX 70 H	AHs	Q62702-C1481				
BCX 70 J	AJs	Q62702-C1552				
BCX 70 K	AKs	Q62702-C1571				

<sup>1)</sup> For detailed information see chapter Package Outlines.

**Maximum Ratings**

Parameter	Symbol	Values			Unit
		BCW 60	BCW 60 FF	BCX 70	
Collector-emitter voltage	$V_{CEO}$	32	32	45	V
Collector-base voltage	$V_{CBO}$	32	32	45	
Emitter-base voltage	$V_{EBO}$		5		
Collector current	$I_C$		100		mA
Peak collector current	$I_{CM}$		200		
Peak base current	$I_{BM}$		200		
Total power dissipation, $T_S = 71 \text{ }^\circ\text{C}$	$P_{tot}$		330		mW
Junction temperature	$T_j$		150		$^\circ\text{C}$
Storage temperature range	$T_{stg}$		– 65 ... + 150		

**Thermal Resistance**

Junction - ambient <sup>1)</sup>	$R_{th JA}$	$\leq 310$	K/W
Junction - soldering point	$R_{th JS}$	$\leq 240$	

---

<sup>1)</sup> Package mounted on epoxy pcb 40 mm × 40 mm × 1.5 mm/6 cm<sup>2</sup> Cu.

**Electrical Characteristics**at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

**DC characteristics**

Collector-emitter breakdown voltage $I_C = 10 \text{ mA}$	$V_{(\text{BR})\text{CE}0}$	32 45	— —	— —	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}$	$V_{(\text{BR})\text{CB}0}$	32 45	— —	— —	
Emitter-base breakdown voltage $I_E = 1 \mu\text{A}$	$V_{(\text{BR})\text{EB}0}$	5	—	—	
Collector cutoff current $V_{CB} = 32 \text{ V}$	$I_{CB0}$	—	—	20	nA
$V_{CB} = 45 \text{ V}$		—	—	20	nA
$V_{CB} = 32 \text{ V}, T_A = 150^\circ\text{C}$	BCW 60, BCW 60 FF	—	—	20	$\mu\text{A}$
$V_{CB} = 45 \text{ V}, T_A = 150^\circ\text{C}$	BCX 70	—	—	20	$\mu\text{A}$
Emitter cutoff current $V_{EB} = 4 \text{ V}$	$I_{EB0}$	—	—	20	nA
DC current gain <sup>1)</sup> $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}$	$h_{FE}$	20 20 40 100	140 200 300 460	— — — —	—
BCW 60 A, BCX 70 G		120	170	220	
BCW 60 B, BCX 70 H		180	250	310	
BCW 60 FF, BCW 60 C, BCX 70 J		250	350	460	
BCW 60 FN, BCW 60 D, BCX 70 K		380	500	630	
$I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}$					
BCW 60 A, BCX 70 G		50	—	—	
BCW 60 B, BCX 70 H		70	—	—	
BCW 60 FF, BCW 60 C, BCX 70 J		90	—	—	
BCW 60 FN, BCW 60 D, BCX 70 K		100	—	—	
$I_C = 50 \text{ mA}, V_{CE} = 1 \text{ V}$					

<sup>1)</sup> Pulse test:  $t \leq 300 \mu\text{s}$ ,  $D \leq 2 \%$ .

**Electrical Characteristics**at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

**DC characteristics**

Collector-emitter saturation voltage <sup>1)</sup> $I_C = 10 \text{ mA}, I_B = 0.25 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 1.25 \text{ mA}$	$V_{CEsat}$	—	0.12	0.25	V
Base-emitter saturation voltage <sup>1)</sup> $I_C = 10 \text{ mA}, I_B = 0.25 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 1.25 \text{ mA}$	$V_{BEsat}$	—	0.70	0.85	
Base-emitter voltage $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}$ $I_C = 50 \text{ mA}, V_{CE} = 1 \text{ V}$ <sup>1)</sup>	$V_{BE(\text{on})}$	— 0.55 —	0.52 0.65 0.78	— 0.75 —	

**AC characteristics**

Transition frequency $I_C = 20 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	$f_T$	—	250	—	MHz
Output capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{obo}$	—	3	—	pF
Input capacitance $V_{EB} = 0.5 \text{ V}, f = 1 \text{ MHz}$	$C_{ibo}$	—	8	—	
Short-circuit input impedance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BCW 60 A, BCX 70 G BCW 60 B, BCX 70 H BCW 60 FF, BCW 60 C, BCX 70 J BCW 60 FN, BCW 60 D, BCX 70 K	$h_{11e}$	— — — —	2.7 3.6 4.5 7.5	— — — —	kΩ
Open-circuit reverse voltage transfer ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BCW 60 A, BCX 70 G BCW 60 B, BCX 70 H BCW 60 FF, BCW 60 C, BCX 70 J BCW 60 FN, BCW 60 D, BCX 70 K	$h_{12e}$	— — — —	1.5 2.0 2.0 3.0	— — — —	$10^{-4}$

<sup>1)</sup> Pulse test:  $t \leq 300 \mu\text{s}$ ,  $D \leq 2 \%$ .


**Electrical Characteristics**at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	


**AC characteristics**

Short-circuit forward current transfer ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BCW 60 A, BCX 70 G BCW 60 B, BCX 70 H BCW 60 FF, BCW 60 C, BCX 70 J BCW 60 FN, BCW 60 D, BCX 70 K	$h_{21e}$	—	200	—	—
Open-circuit output admittance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BCW 60 A, BCX 70 G BCW 60 B, BCX 70 H BCW 60 FF, BCW 60 C, BCX 70 J BCW 60 FN, BCW 60 D, BCX 70 K	$h_{22e}$	—	18	—	$\mu\text{s}$
Noise figure $I_C = 0.2 \text{ mA}, V_{CE} = 5 \text{ V}, R_s = 2 \text{ k}\Omega$ $f = 1 \text{ kHz}, \Delta f = 200 \text{ Hz}$ BCW 60 A to BCX 70 K BCW 60 FF, BCW 60 FN	$F$	—	2	—	dB
Equivalent noise voltage $I_C = 0.2 \text{ mA}, V_{CE} = 5 \text{ V}, R_s = 2 \text{ k}\Omega$ $f = 10 \text{ Hz} \dots 50 \text{ Hz}$ BCW 60 FF, BCW 60 FN	$V_n$	—	1	2	$\mu\text{V}$


**Total power dissipation**  $P_{\text{tot}} = f(T_A^*; T_S)$   
 \* Package mounted on epoxy

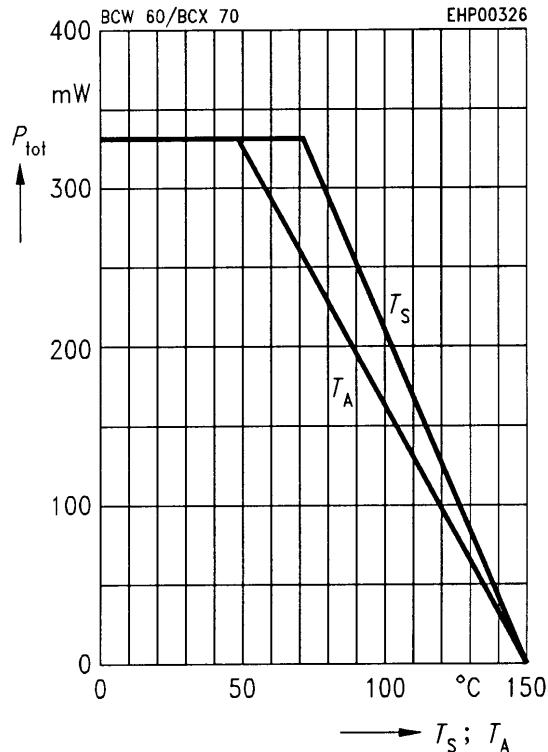


**Collector-base capacitance**  $C_{\text{CBO}} = f(V_{\text{CBO}})$   
**Emitter-base capacitance**  $C_{\text{EBO}} = f(V_{\text{EBO}})$

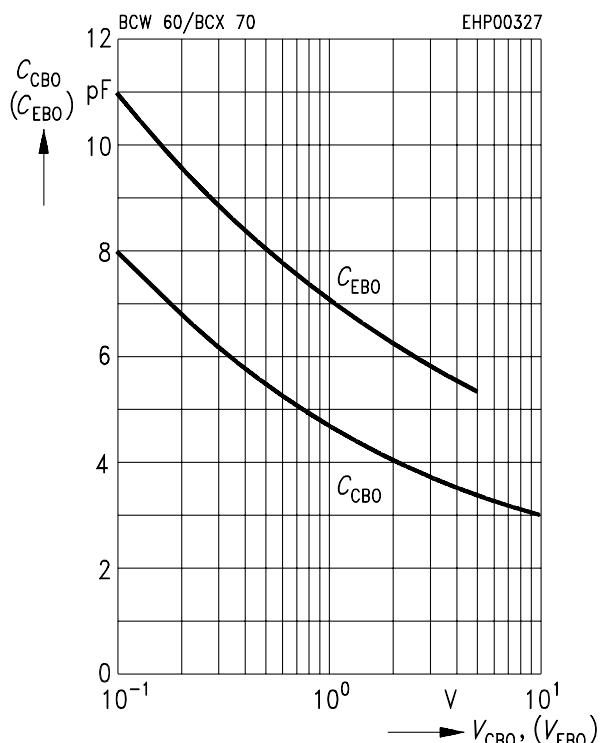

**Permissible pulse load**  $P_{\text{tot max}}/P_{\text{tot DC}} = f(t_p)$

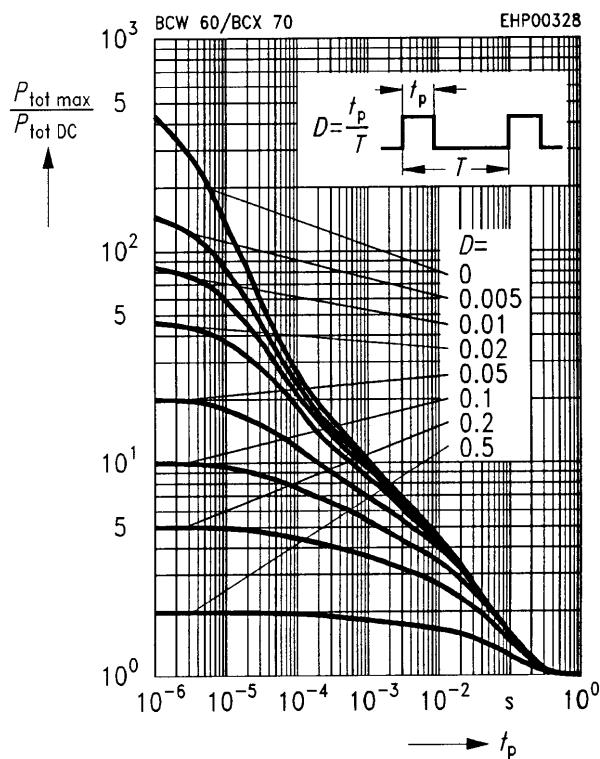


**Transition frequency**  $f_T = f(I_C)$   
 $V_{\text{CE}} = 5 \text{ V}$

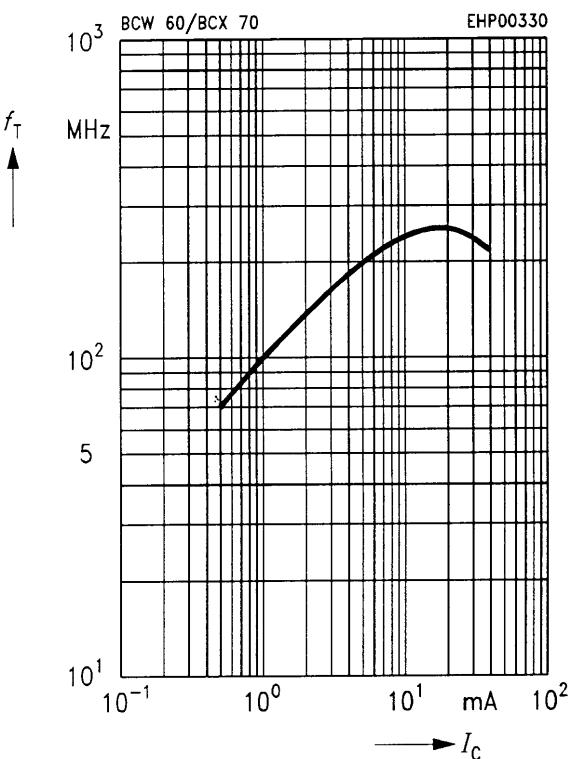

### Base-emitter saturation voltage


$$I_C = f(V_{BEsat})$$

$$h_{FE} = 40$$

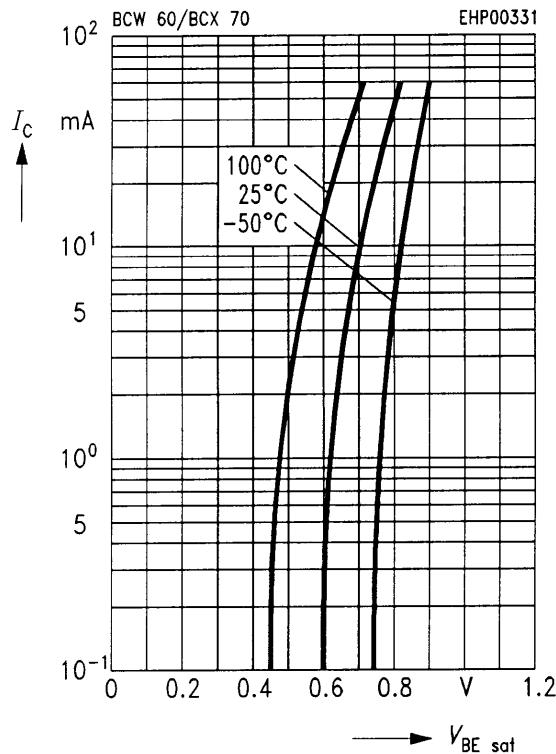

### Collector current $I_C = f(V_{BE})$


$$V_{CE} = 5 \text{ V}$$

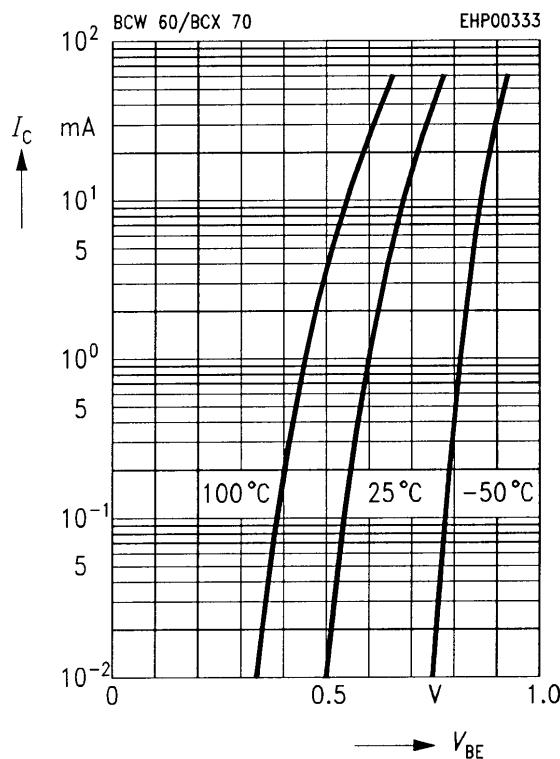

### Collector-emitter saturation voltage


$$I_C = f(V_{CEsat})$$

$$h_{FE} = 40$$

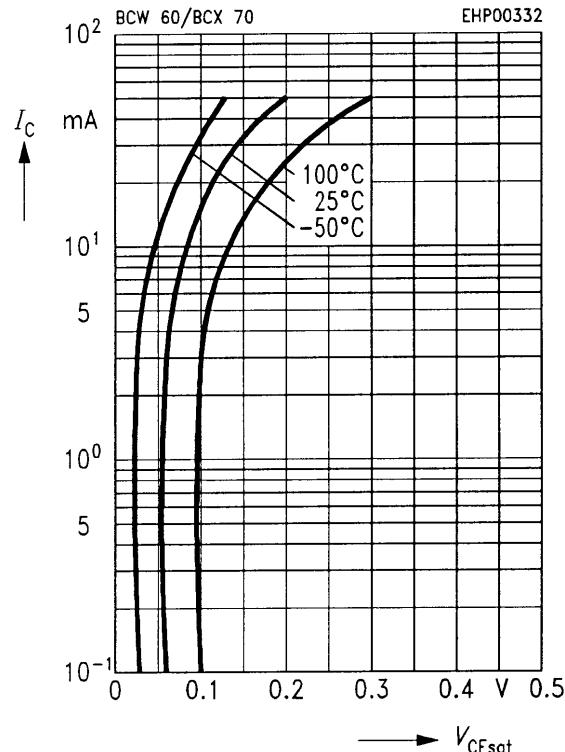


### DC current gain $h_{FE} = f(I_C)$


$$V_{CE} = 5 \text{ V}$$

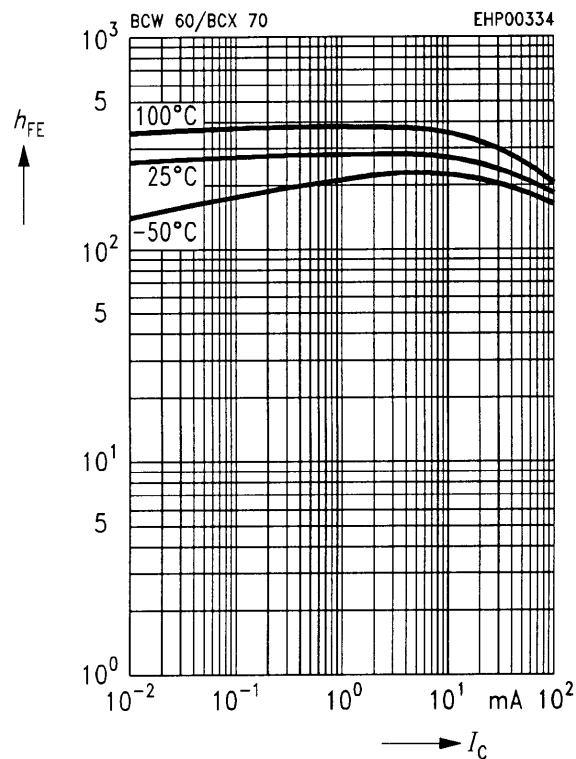


**Collector cutoff current**  $I_{CB0} = f(T_A)$

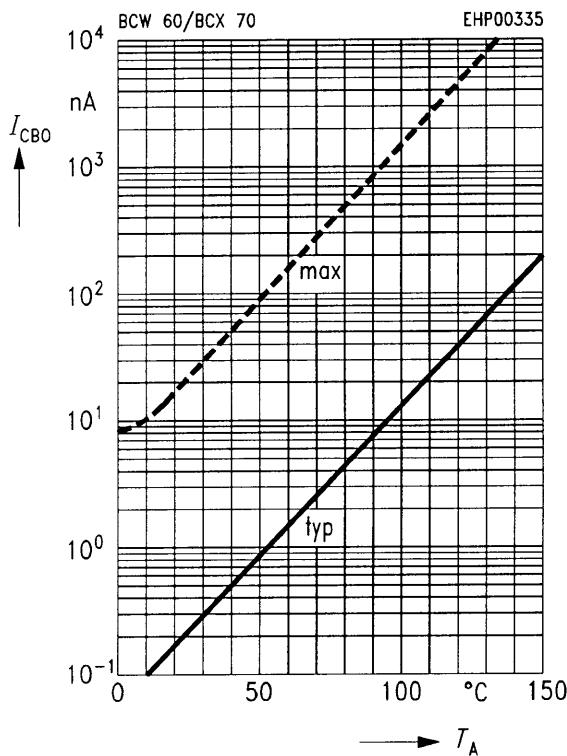


**h parameter**  $h_e = f(I_C)$   
 $V_{CE} = 5$  V

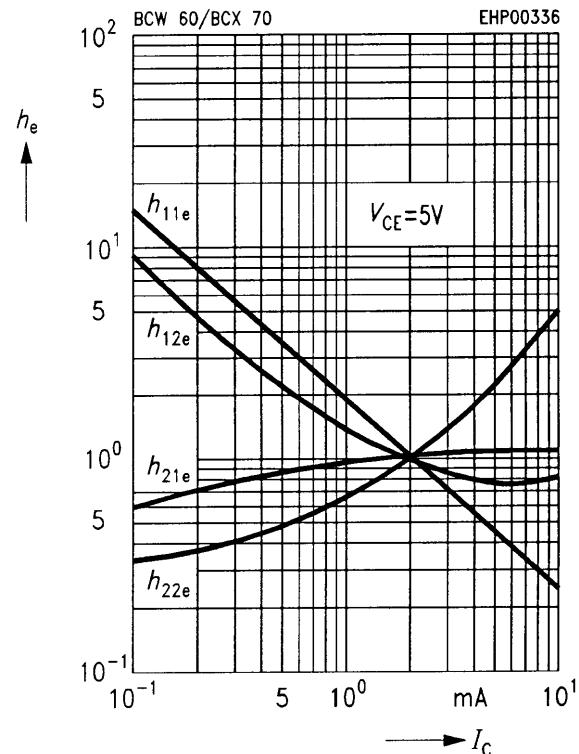

**h parameter**  $h_e = f(V_{CE})$   
 $I_C = 2$  mA

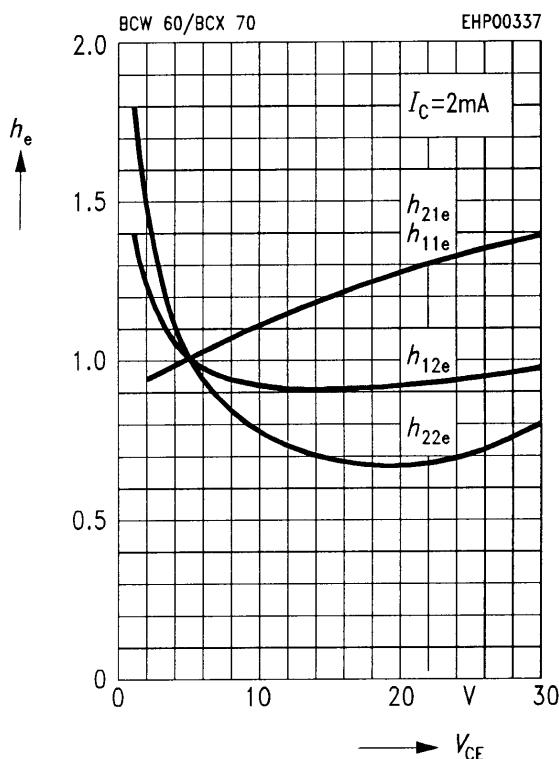


**Noise figure**  $F = f(V_{CE})$   
 $I_C = 0.2$  mA,  $R_S = 2$  kΩ,  $f = 1$  kHz

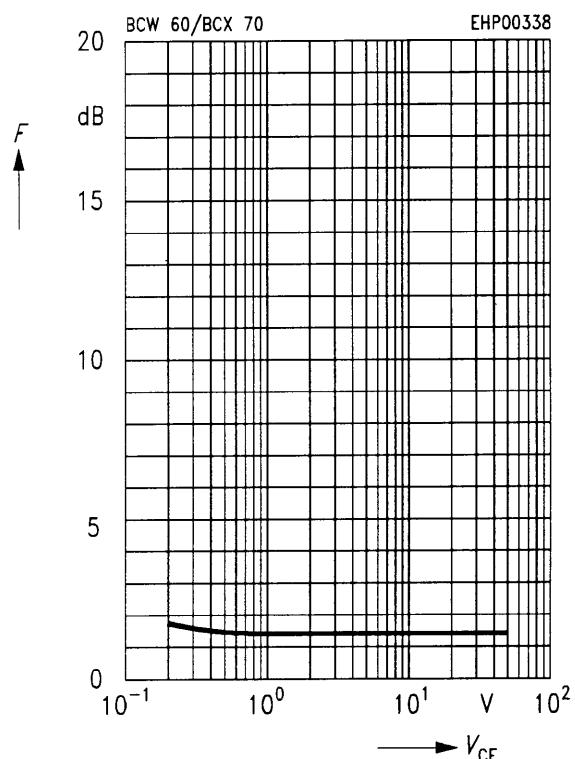


**Noise figure  $F = f(f)$**

$I_C = 0.2 \text{ mA}$ ,  $R_S = 2 \text{ k}\Omega$ ,  $V_{CE} = 5 \text{ V}$

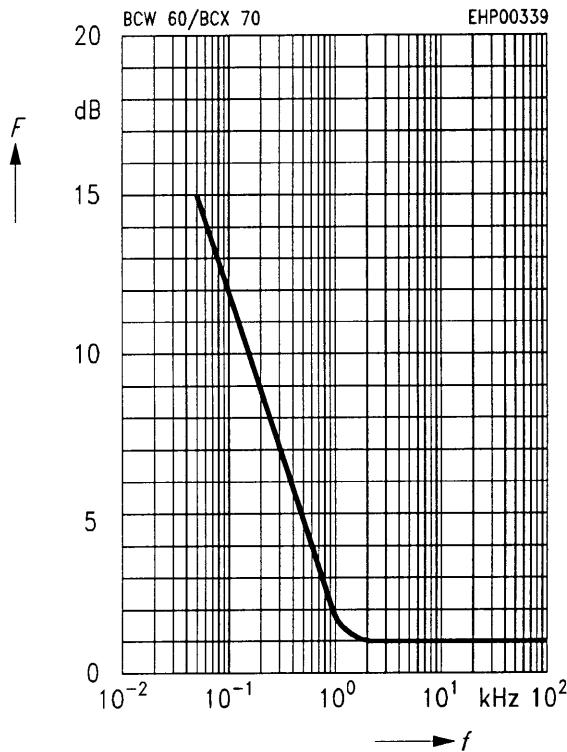


**Noise figure  $F = f(I_C)$**

$V_{CE} = 5 \text{ V}$ ,  $f = 120 \text{ Hz}$

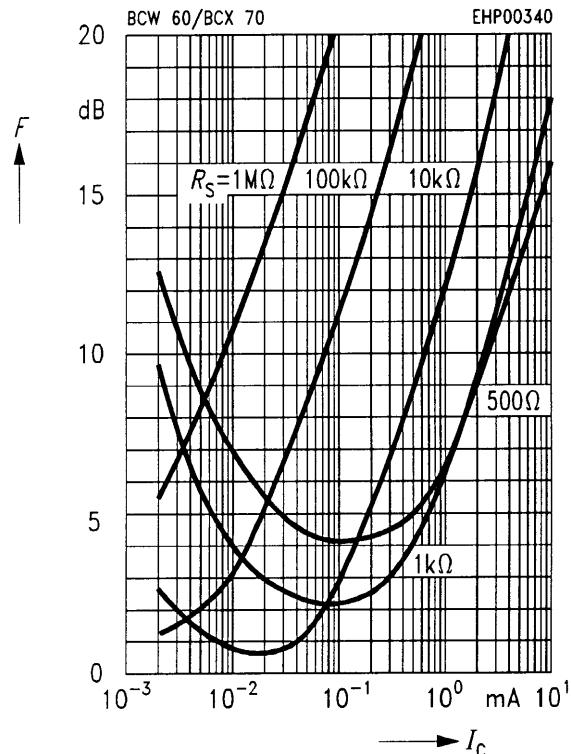

**Noise figure  $F = f(I_C)$**

$V_{CE} = 5 \text{ V}$ ,  $f = 1 \text{ kHz}$

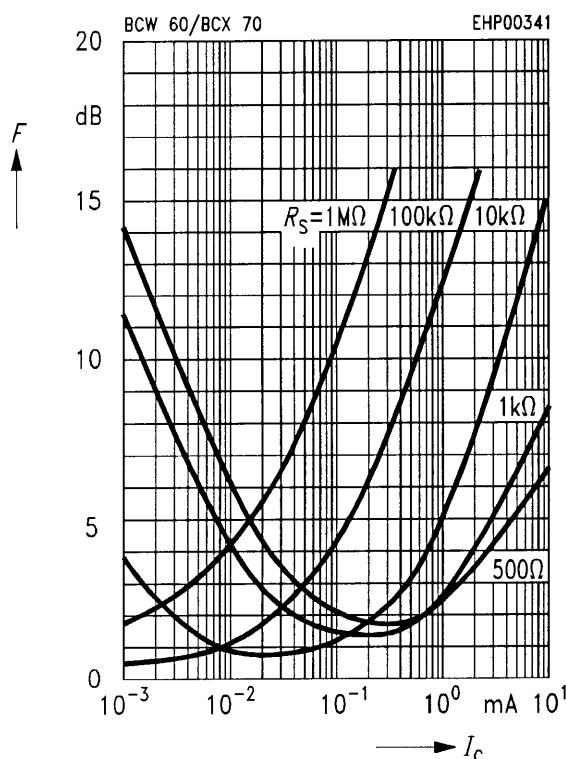

**Noise figure  $F = f(I_C)$**

$V_{CE} = 5 \text{ V}$ ,  $f = 10 \text{ kHz}$

