


NPN Silicon AF Transistors

BC 817
BC 818

- For general AF applications
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BC 807, BC 808 (PNP)

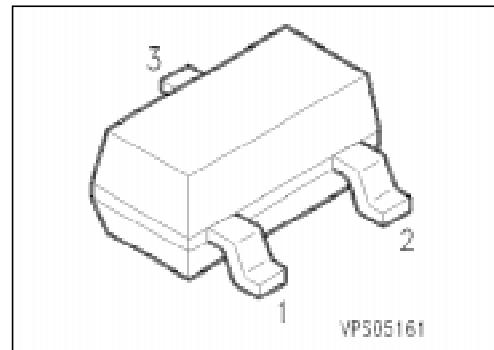

Type	Marking	Ordering Code	Pin Configuration			Package ¹⁾
			1	2	3	
BC 817-16	6As	Q62702-C1732	B	E	C	SOT-23
BC 817-25	6Bs	Q62702-C1690				
BC 817-40	6Cs	Q62702-C1738				
BC 818-16	6Es	Q62702-C1739				
BC 818-25	6Fs	Q62702-C1740				
BC 818-40	6Gs	Q62702-C1505				

¹⁾ For detailed information see chapter Package Outlines.

Maximum Ratings

Parameter	Symbol	Values		Unit
		BC 817	BC 818	
Collector-emitter voltage	V_{CEO}	45	25	V
Collector-base voltage	V_{CBO}	50	30	
Emitter-base voltage	V_{EBO}	5	5	
Collector current	I_C	500		mA
Peak collector current	I_{CM}	1		A
Base current	I_B	100		mA
Peak base current	I_{BM}	200		
Total power dissipation, $T_c = 79 \text{ } ^\circ\text{C}$	P_{tot}	330		mW
Junction temperature	T_j	150		$^\circ\text{C}$
Storage temperature range	T_{stg}	– 65 ... + 150		

Thermal Resistance

Junction - ambient ¹⁾	$R_{th JA}$	≤ 285	K/W
Junction - soldering point	$R_{th JS}$	≤ 215	

¹⁾ Package mounted on epoxy pcb 40 mm × 40 mm × 1.5 mm/6 cm² Cu.

Electrical Characteristicsat $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC characteristics


Collector-emitter breakdown voltage $I_C = 10 \text{ mA}$	$V_{(\text{BR})\text{CE}0}$				V
BC 817		45	—	—	
BC 818		25	—	—	
Collector-base breakdown voltage $I_C = 100 \mu\text{A}$	$V_{(\text{BR})\text{CB}0}$				
BC 817		50	—	—	
BC 818		30	—	—	
Emitter-base breakdown voltage, $I_E = 10 \mu\text{A}$	$V_{(\text{BR})\text{EB}0}$	5	—	—	
Collector cutoff current $V_{\text{CB}} = 25 \text{ V}$	I_{CBO}	—	—	100	nA
$V_{\text{CB}} = 25 \text{ V}, T_A = 150^\circ\text{C}$		—	—	50	μA
Emitter cutoff current, $V_{\text{EB}} = 4 \text{ V}$	I_{EBO}	—	—	100	nA
DC current gain ¹⁾ $I_C = 100 \text{ mA}; V_{\text{CE}} = 1 \text{ V}$	h_{FE}				—
BC 817-16, BC 818-16		100	160	250	
BC 817-25, BC 818-25		160	250	400	
BC 817-40, BC 818-40		250	350	630	
$I_C = 300 \text{ mA}; V_{\text{CE}} = 1 \text{ V}$					
BC 817-16, BC 818-16		60	—	—	
BC 817-25, BC 818-25		100	—	—	
BC 817-40, BC 818-40		170	—	—	
Collector-emitter saturation voltage ¹⁾ $I_C = 500 \text{ mA}; I_B = 50 \text{ mA}$	V_{CEsat}	—	—	0.7	V
Base-emitter saturation voltage ¹⁾ $I_C = 500 \text{ mA}; I_B = 50 \text{ mA}$	V_{BEsat}	—	—	2	

AC characteristics


Transition frequency $I_C = 50 \text{ mA}, V_{\text{CE}} = 5 \text{ V}, f = 20 \text{ MHz}$	f_T	—	170	—	MHz
Output capacitance $V_{\text{CB}} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{obo}	—	6	—	pF
Input capacitance $V_{\text{EB}} = 0.5 \text{ V}, f = 1 \text{ MHz}$	C_{ibo}	—	60	—	

¹⁾ Pulse test: $t \leq 300 \mu\text{s}$, $D \leq 2 \%$.


Total power dissipation $P_{\text{tot}} = f(T_A^*; T_S)$
 * Package mounted on epoxy

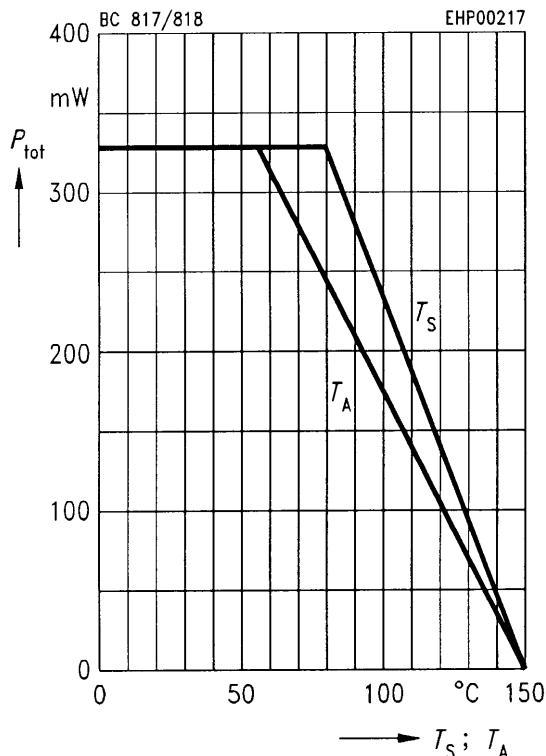


Transition frequency $f_T = f(I_C)$
 $V_{CE} = 5$ V

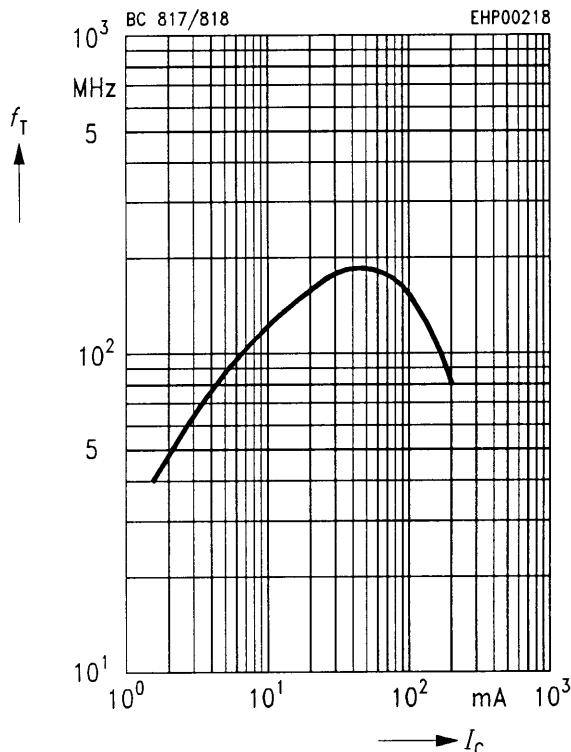

Permissible pulse load $P_{\text{tot max}}/P_{\text{tot DC}} = f(t_p)$

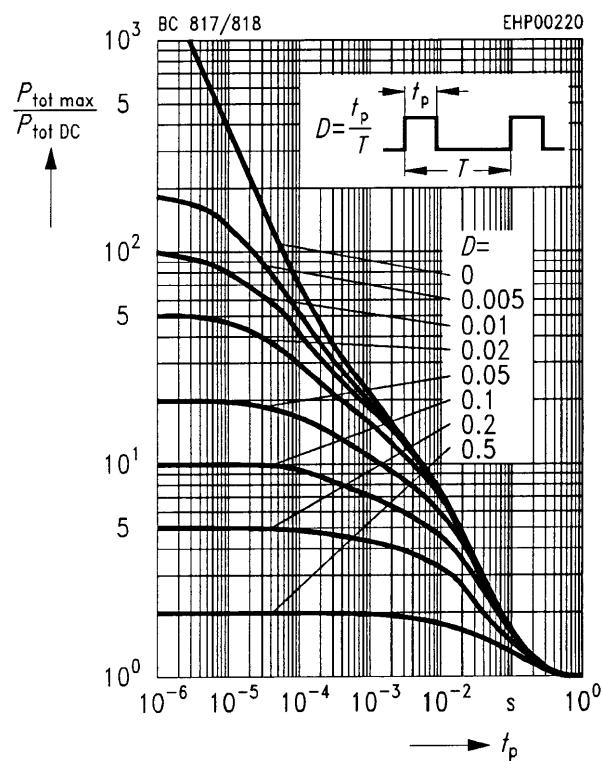


Collector cutoff current $I_{CB0} = f(T_A)$
 $V_{CB0} = 60$ V

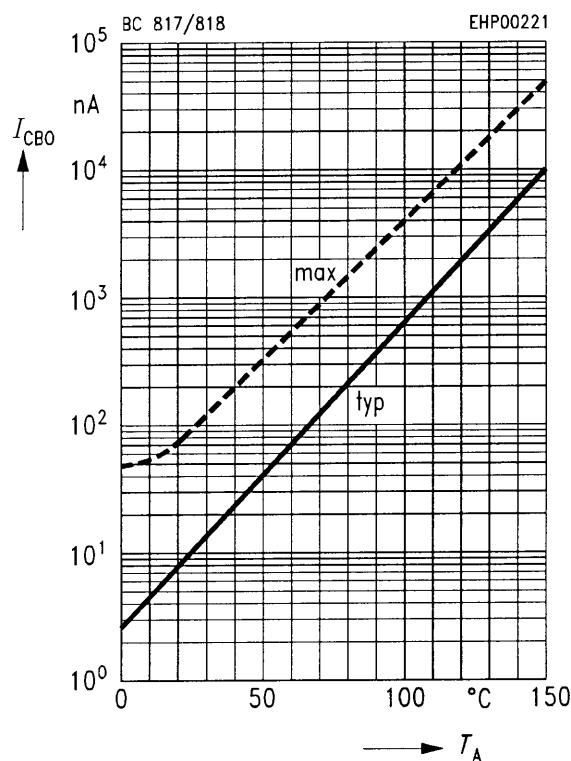

Base-emitter saturation voltage


$$I_C = f(V_{BEsat})$$

$$h_{FE} = 10$$

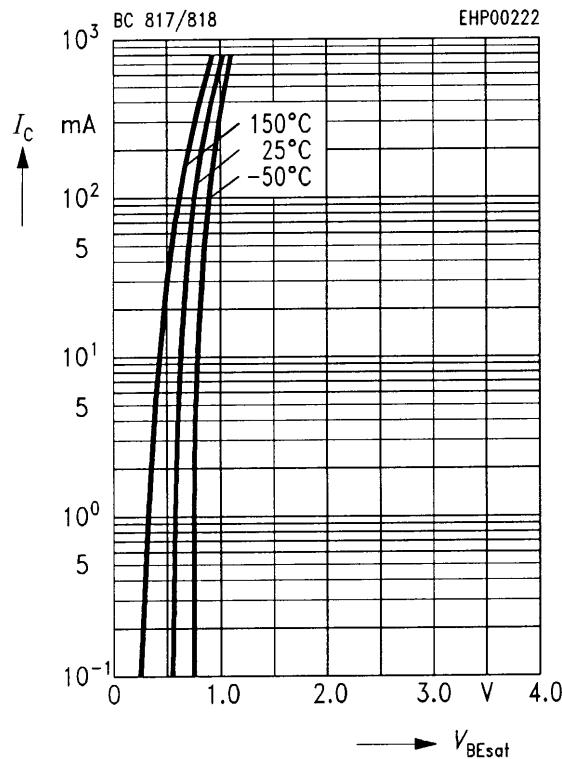**Collector-emitter saturation voltage**

$$I_C = f(V_{CEsat})$$

$$h_{FE} = 10$$

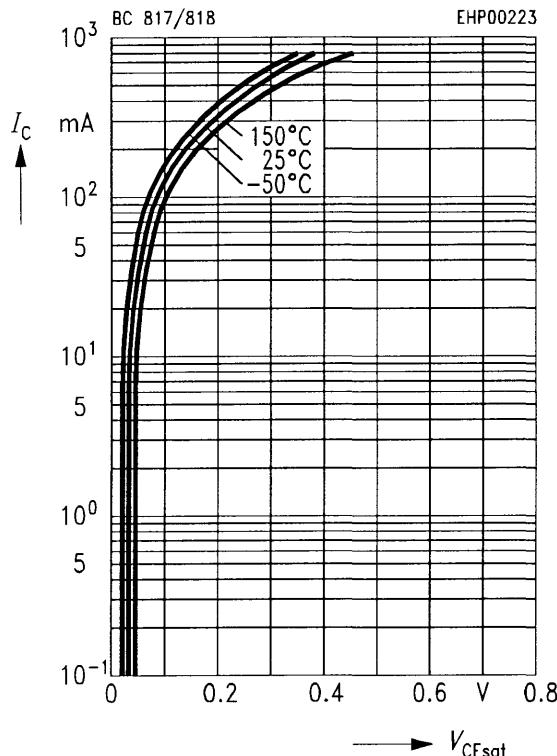**DC current gain $h_{FE} = f(I_c)$**

$$V_{CE} = 1 \text{ V}$$

