




RoHS
COMPLIANT



case: E92



Features

- Glass passivated Bridge Rectifiers
- Ideal for automated placement
- Very low profile - max height 1.4 mm
- Moisture sensitivity: level 1, per J-STD-020
- High temperature soldering guaranteed: 260°C/10 seconds

Mechanical Data

- Case:E92,Molding compound meets UL 94V-0 flammability rating
- Terminals:Matte tin plated leads,solderable per MII-STD-750 Method 2026,J-STD-002 and JESD22-B102

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for TV,Monitor,SMPS,Adapter, Printer,Audio equipment,and Home Applications application


Maximum Ratings (TA = 25 °C unless otherwise noted)				
Parameter	Symbol	E92305A	E92306A	Unit
Maximum repetitive peak reverse voltage	VRRM	600	800	V
Maximum RMS voltage	VRMS	420	560	V
Maximum DC blocking voltage	VDC	600	800	V
Maximum average output rectified current	Io(AV) ¹⁾	3.0		A
	Io(AV) ²⁾	2.5		
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	IFSM	95		A
Rating for fusing (t≤8.3ms)	I ² t	38		A ² s
Operating junction and storage temperature range	TJ, TSTG	-55 to +150		°C

Electrical Characteristics (TA = 25 °C unless otherwise noted)					
Parameter	Test Conditions	Symbol	E92305A	E92306A	Unit
Maximum Instantaneous forward voltage	IF=1.5A, Ta=25°C	VF	1.0		Volts
	IF=1.5A, Ta=125°C		0.95		
	IF=3.0A, Ta=25°C		1.05		
	IF=3.0A, Ta=125°C		0.95		
Maximum DC reverse current at rated DC blocking voltage	Ta=25°C	IR	5.0		µA
	Ta=125°C		100		
Typical junction capacitance	4.0 V, 1 MHz	CJ	32		pF
Typical thermal resistance ²⁾	junction to ambient	RθJA	TBD		°C/W
	junction to case	RθJC	TBD		

Note 1). mounted recommended copper pad areas with Al substrate PCB

2). mounted 13*13mm copper pad areas with FR-4 PCB

Package Outline Dimensions

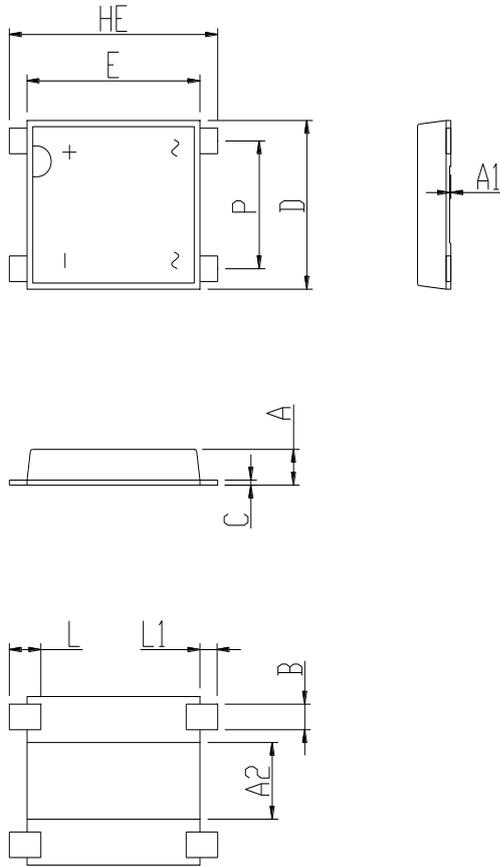


unit:mm

Dim	Min	Nom.	Max
HE	8.55	8.75	8.95
E	7.06	7.26	7.46
D	6.40	6.6	6.80
P	4.80	5.0	5.20
A	1.30	1.4	1.50
C	0.18	0.2	0.30
L	1.00	1.30	1.50
L1	0.60	0.75	1.00
B	0.85	1.0	1.15
A1	-	0.05	-
A2	-	3.0	-

Soldering Pad Reference

Unit:mm

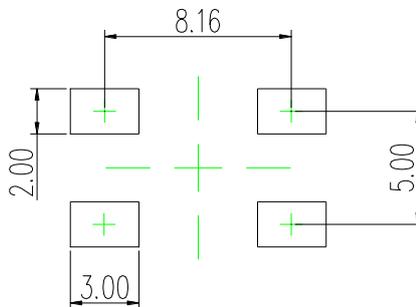



E92305A thru E92306A

Surface Mount Glass Passivated Single Phase Bridge Rectifier
Reverse Voltage 600~800V Output Current 3.0A

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.