


NPN Silicon AF Power Transistors

- For AF drivers and output stages
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Complementary type: BDP952...BDP956 (PNP)

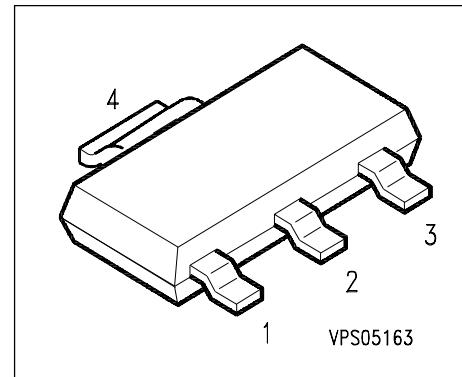

Type	Marking	Ordering Code	Pin Configuration				Package
BDP 951	BDP 951	Q62702-D1339	1 = B	2 = C	3 = E	4 = C	SOT-223
BDP 953	BDP 953	Q62702-D1341	1 = B	2 = C	3 = E	4 = C	SOT-223
BDP 955	PDP 955	Q62702-D1343	1 = B	2 = C	3 = E	4 = C	SOT-223

Maximum Ratings

Parameter	Symbol	Values	Unit
Collector-emitter voltage BDP 951	V_{CEO}	80	V
BDP 953		100	
BDP 955		120	
Collector-base voltage BDP 951	V_{CBO}	100	
BDP 953		120	
BDP 955		140	
Emitter-base voltage	V_{EBO}	5	
DC collector current Peak collector current	I_C	3	A
Base current	I_{CM}	5	
Peak base current	I_B	200	mA
Total power dissipation, $T_S = 99^\circ\text{C}$	P_{tot}	3	
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	- 65 ... + 150	

Thermal Resistance

Junction ambient ¹⁾	R_{thJA}	≤ 42	K/W
Junction - soldering point	R_{thJS}	≤ 17	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm² Cu

Electrical Characteristics at $T_A=25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 10 \text{ mA}, I_B = 0 \text{ mA}$, BDP 951	$V_{(\text{BR})\text{CEO}}$	80	-	-	V
$I_C = 10 \text{ mA}, I_B = 0 \text{ mA}$, BDP 953		100	-	-	
$I_C = 10 \text{ mA}, I_B = 0 \text{ mA}$, BDP 955		120	-	-	
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$, BDP 951	$V_{(\text{BR})\text{CBO}}$	100	-	-	
$I_C = 100 \mu\text{A}, I_B = 0$, BDP 953		120	-	-	
$I_C = 100 \mu\text{A}, I_B = 0$, BDP 955		140	-	-	
Base-emitter breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
Collector cutoff current $V_{CB} = 100 \text{ V}, I_E = 0, T_A = 25^\circ\text{C}$	I_{CBO}	-	-	100	nA
$V_{CB} = 100 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$		-	-	20	μA
Emitter cutoff current $V_{EB} = 4 \text{ V}, I_C = 0$	I_{EBO}	-	-	100	nA
DC current gain $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}$	h_{FE}	25	-	-	-
$I_C = 500 \text{ mA}, V_{CE} = 1 \text{ V}$		40	-	475	
$I_C = 2 \text{ A}, V_{CE} = 2 \text{ V}$		15	-	-	
Collector-emitter saturation voltage 1) $I_C = 2 \text{ A}, I_B = 0.2 \text{ A}$	V_{CEsat}	-	-	0.8	V
Base-emitter saturation voltage 1) $I_C = 2 \text{ A}, I_B = 0.2 \text{ A}$	V_{BEsat}	-	-	1.5	


AC Characteristics

Transition frequency $I_C = 50 \text{ mA}, V_{CE} = 10 \text{ V}, f = 100 \text{ MHz}$	f_T	-	100	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{cb}	-	25	-	pF


1) Pulse test: $t < 300 \mu\text{s}$; $D < 2\%$

Total power dissipation $P_{\text{tot}} = f(T_A^*; T_S)$

* Package mounted on epoxy


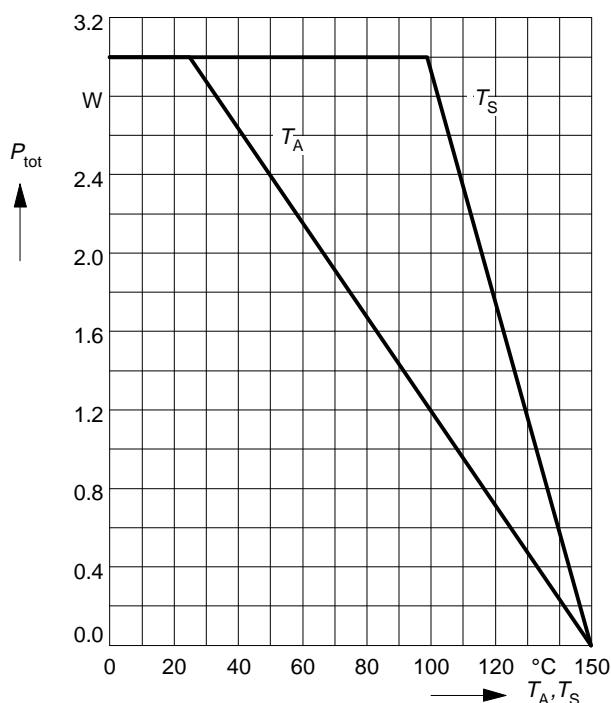


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

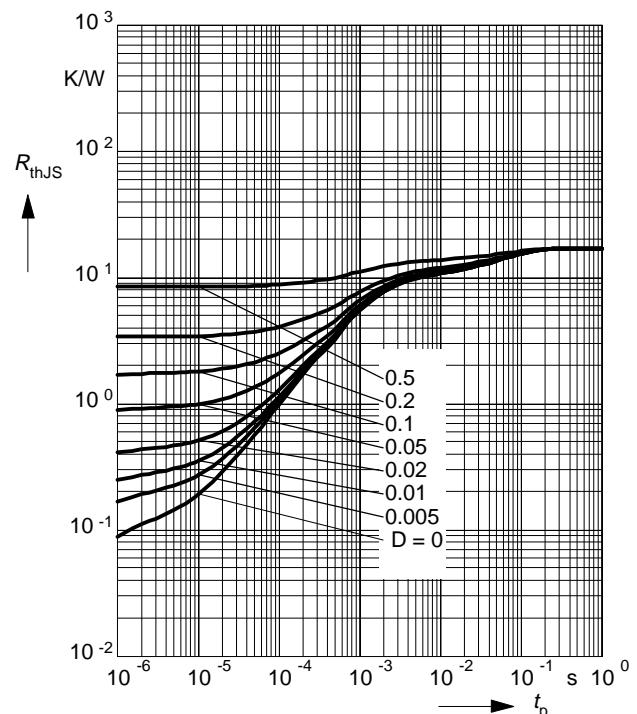


Permissible Pulse Load $P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$ **DC current gain** $h_{\text{FE}} = f(I_C)$


$V_{\text{CE}} = 2\text{V}$

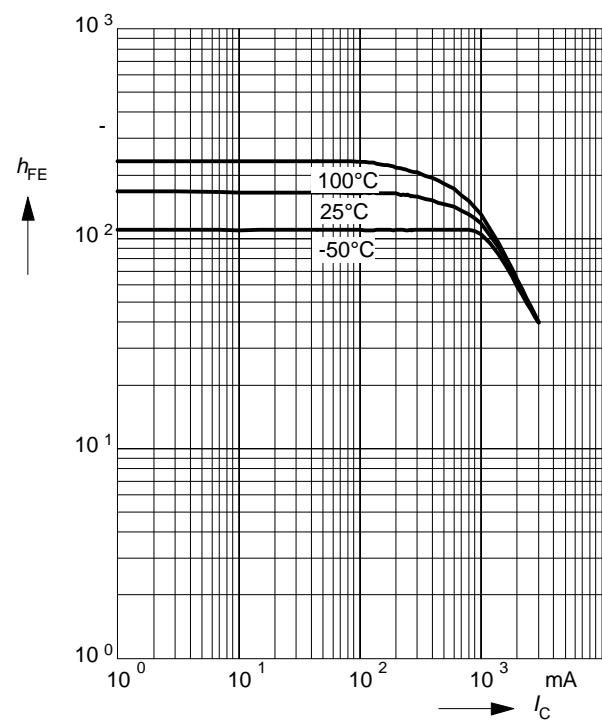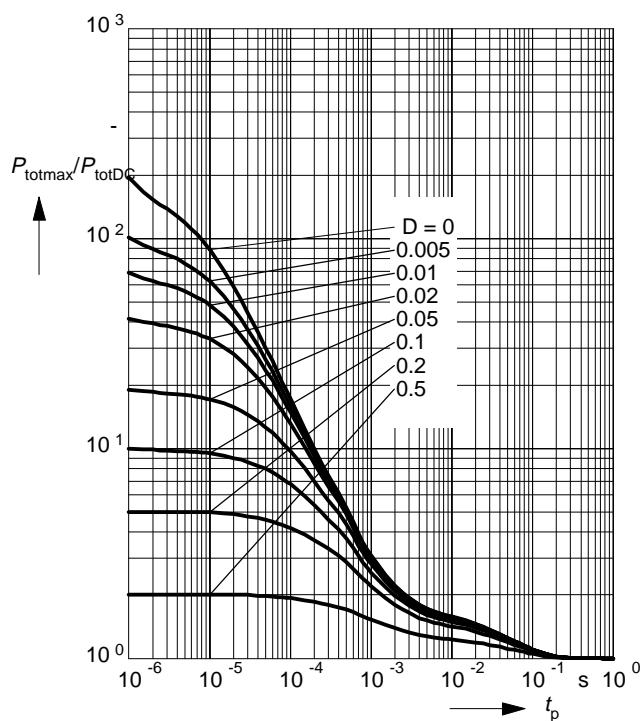


Collector cutoff current $I_{CBO} = f(T_A)$
 $V_{CB} = 45V$

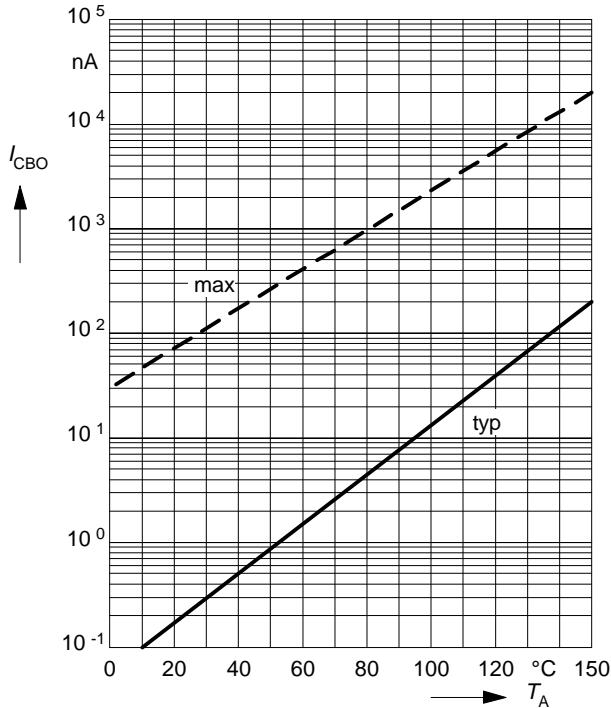

Base-emitter saturation voltage
 $I_C = f(V_{BEsat})$, $h_{FE} = 10$

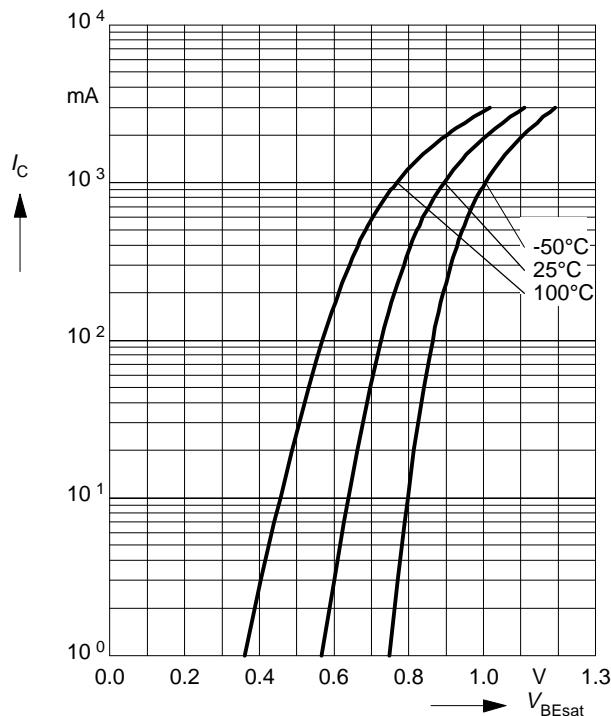

Collector-emitter saturation voltage
 $I_C = f(V_{CEsat})$, $h_{FE} = 10$

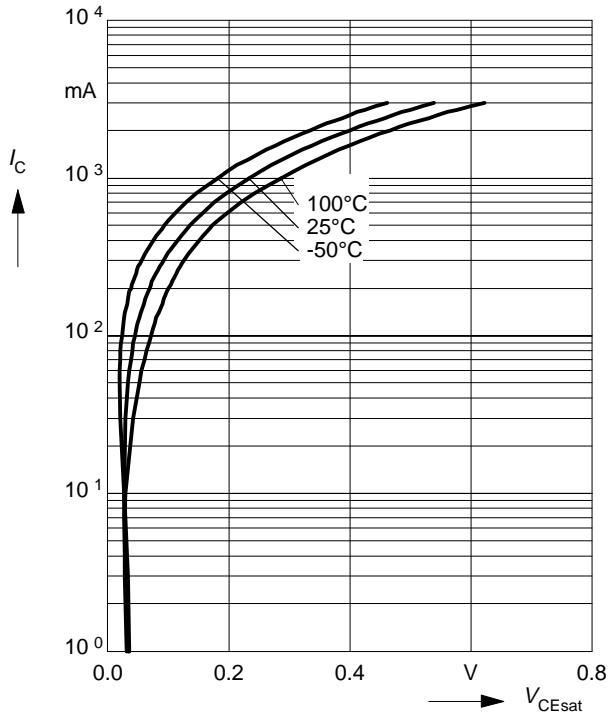

Collector current $I_C = f(V_{BE})$
 $V_{CE} = 2V$

