

High Power Bi-Directional Coupler

BDCA1-6-11+

50Ω 6dB Coupling DC Pass 600 to 1100 MHz



CASE STYLE: DZ944


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	0.25A
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

INPUT	1
OUTPUT	6
COUPLED (forward)	10
COUPLED (reverse)	5
GROUND	2,3,4,7,8,9

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.30	.250	.052	.266	.050	.050	.012
7.62	6.35	1.32	6.76	1.27	1.27	0.30
H	J	K	L	M	wt	
.029	.004	.085	.296	.030	grams	
0.74	0.10	2.16	7.52	0.76	0.25	

Demo Board MCL P/N: TB-115+ Suggested PCB Layout (PL-004)



- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020 ± .0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, 600 to 1100 MHz
- excellent VSWR 1.1:1 typ. all ports
- excellent power handling capability, 42W (1 GHz)
- hermetically sealed
- low temperature variation
- protected by US Patent 7,049,905
- DC current through input to output 0.25A Max. at 1.0 watt RF input power.

Applications

- cellular
- CDMA
- ISM




Bi-Directional Coupler Electrical Specifications

FREQUENCY (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT ² (W)
	Nom.	Max. Flatness	Typ.	Max.	Typ.	Min.		
600-1100								
600-700	6.3±0.5	±0.5	1.5	1.8	23	20	1.05	50
700-1000	6.0±0.4	±0.3	1.8	2.0	27	19	1.08	42
1000-1100	6.3±0.5	±0.5	1.8	2.0	21	15	1.10	38


1. Includes theoretical power loss of 1.25 dB at 6 dB coupling.
2. Derate linearly 1/3 at 100°C

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)		
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
600.00	1.40	6.68	6.69	24.78	23.05	30.54	30.97	32.60	33.54
650.00	1.50	6.40	6.42	26.63	24.36	32.07	32.74	34.99	37.02
700.00	1.58	6.19	6.21	29.10	26.01	33.40	34.55	38.51	42.38
750.00	1.65	6.04	6.06	31.85	27.74	33.76	35.61	40.76	45.57
800.00	1.70	5.95	5.97	34.62	29.30	31.57	33.73	36.58	35.64
850.00	1.73	5.92	5.93	33.02	30.12	29.03	30.84	32.11	31.53
900.00	1.75	5.94	5.95	28.89	28.92	26.56	27.76	28.72	27.61
950.00	1.75	6.02	6.03	25.64	26.63	24.56	25.44	25.96	25.17
1000.00	1.73	6.16	6.17	22.95	24.09	22.83	23.43	23.48	22.80
1050.00	1.71	6.36	6.38	20.36	21.47	20.81	21.27	21.48	21.01
1100.00	1.67	6.64	6.66	18.23	19.16	19.25	19.61	19.68	19.22

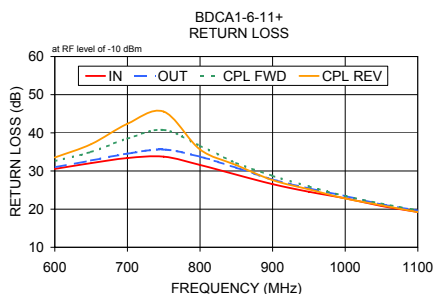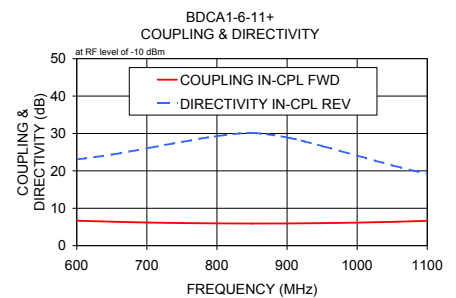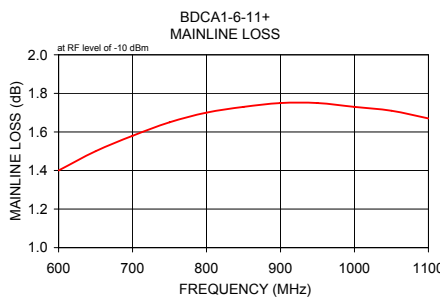

Electrical Schematic



* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITHOUT INTERNAL TRANSFORMERS AND RESISTORS.

